

BLL
LIGHTING

CONTENTS



HIGH BAY LIGHTS

PAGE 1



FLOOD LIGHTS

PAGE 2



AREA LIGHTS

PAGE 3-4




DOWNLIGHTS

PAGE 5-8



CEILING LIGHTS

PAGE 9-35



LIGHT PLATES

PAGE 36-39



PANEL LIGHTS

PAGE 40-41



TUBE LIGHTS

PAGE 42-45



EMERGENCY POWER PACK

PAGE 46



SENSOR POWER KITS

PAGE 47-49



SMART LIGHTS

PAGE 50-52



PLC LIGHTS

PAGE 53



CORN LAMPS

PAGE 54



LIGHT BULBS

PAGE 54-57



STRIP LIGHTS AND ACCESSORIES

PAGE 58-69



POWER SUPPLIES

PAGE 70-73



SPOT LIGHTS AND FITTINGS

PAGE 74-87



TRACK LIGHTS AND FITTINGS

PAGE 88-102



LINEAR LIGHTS

PAGE 103



WALL LIGHTS

PAGE 104-116



PROJECTION LIGHTS

PAGE 117



BOLLARD LIGHTS

PAGE 118-119



UNDERWATER LIGHTS

PAGE 120



SOLAR LIGHTS


PAGE 121-126



PENDANT LIGHTS

PAGE 127-157

HIGH BAY LIGHTS/RETROFIT KIT

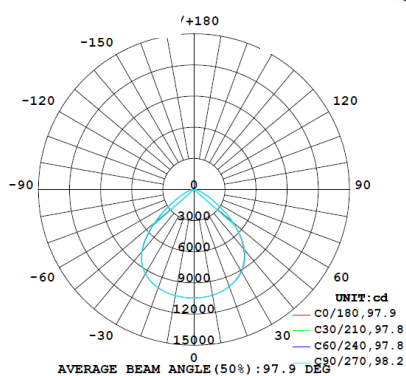

High Bay-16


Model	Power (W)	Lumens (lm)	Voltage (VAC)	D (mm)	H (mm)	Dimmable		Color Temp
HB100Y16	100	15000	100-277	254	122	No		3000/4000/6500
HB150Y16	150	22500	100-277	299	135	Wattage Adjustable		3CCT
HB200Y16	200	30000	100-277	365	135	Wattage Adjustable		3CCT
HB250Y16	250	37500	185-265	385	151	No		3000/4000/6500
HB300Y16	300	45000	185-265	385	151	No		3000/4000/6500
Material	CRI (Ra)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	LED Chip	PF	Working Temp (°C)
AL	>80	60/90	35000	Lifud	65	Epistar	>0.95	-20--45

*3CCT = 3000k,4500k,6500k


FLOOD LIGHTS




10W




30W




50W



100W



200W



Flood Light-16

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Voltage (VAC)	Color Temp (K)
FL10Y16	10	900	>80	90	31	70	220-240	3CCT
FL20Y16	20	1800	>80	120	31	95	220-240	3CCT
FL30Y16	30	2700	>80	153	31	125	220-240	3CCT
FL50Y16	50	4500	>80	187	31	146	220-240	3CCT
FL70Y16	70	6300	>80	228	32	187	220-240	3CCT
FL100Y16	100	9000	>80	272	32	217	220-240	3CCT
FL200Y17	200	18000	>80	350	90	280	100-265	3000/6500
FL300Y17	300	27000	>80	369	80	400	100-265	3000/6500
FL400Y17	400	36000	>80	439	90	480	100-265	3000/6500
FL500Y17	500	45000	>80	439	90	480	100-265	3000/6500
Material	Dimmable	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
AL+Glass	No	100	30000	Built In	65	>0.9	Clear	-40--45

*3CCT = 3000k,4500k,6500k

*Wire Length 0.5m

AREA LIGHTS/STREET LIGHTS




Area Light-05

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
AL300Y05	300	42000	>70	785	316	75	No	AL
AL350Y05	350	49000	>70	785	316	75	No	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	100-277	80*150	50000	Built In	67	>0.95	Clear	-40--50



Area Light-11


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
AL200Y11	200	28000	>80	388	399	139	No	AL
AL300Y11	300	42000	>80	388	491	139	No	AL
AL400Y11	400	56000	>80	388	583	190	No	AL
AL500Y11	500	70000	>80	388	675	190	No	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	100-277	20/30/60/90/140	50000	Meanwell Built In	65	>0.95	Clear	-20--50



Downlight-24



Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Cut Hole (mm)	Shape	Material
D6Y12R24	12+4	840	>80	195	8	155	Round	AL+PC
D8Y18R24	18+6	1250	>80	245	8	210	Round	AL+PC
D6Y12S24	12+4	960	>80	195	8	155	Square	AL+PC
D8Y18S24	18+6	1440	>80	245	8	210	Square	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Tri Tone	170-265	120	35000	External	40	0.5	Frosted	-25--45

DOWNLIGHTS

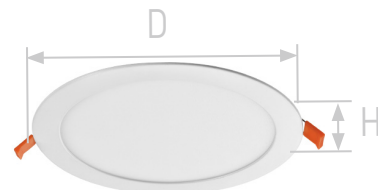

Downlight Extra Thin-03

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Cut Hole (mm)	Shape	Material
R2Y06N01	6	420	>80	120	20	110	Round	AL+PC
R2Y09N01	9	680	>80	148	20	135	Round	AL+PC
R2Y12N01	12	960	>80	173	20	157	Round	AL+PC
R2Y15N01	15	1200	>80	200	20	185	Round	AL+PC
R2Y18N01	18	1400	>80	225	20	205	Round	AL+PC
S2Y06N01	6	420	>80	120	20	110	Square	AL+PC
S2Y09N01	9	680	>80	148	20	135	Square	AL+PC
S2Y12N01	12	960	>80	173	20	157	Square	AL+PC
S2Y15N01	15	1200	>80	200	20	185	Square	AL+PC
S2Y18N01	18	1400	>80	225	20	205	Square	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	90-265	120	35000	External	20	0.5	Frosted	-25--45

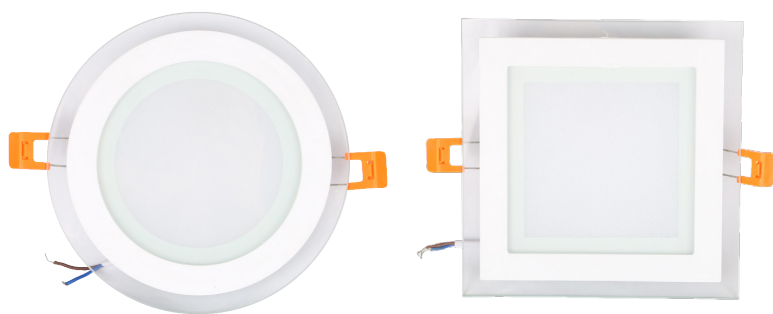

Downlight-23

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Cut Hole (mm)	Shape	Material
D5Y12R23	12	960	>80	160	45	125	Round	AL+PC
D6Y18R23	18	1440	>80	200	45	170	Round	AL+PC
D5Y12S23	12	960	>80	160	45	125	Square	AL+PC
D6Y18S23	18	1440	>80	200	45	170	Square	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3CCT/Tri	170-265	120	35000	External	40	0.5	Frosted	-25--45


*3CCT = 3000k,4500k,6500k



Downlight-13

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	PF	Material
D4Y09R13	9	810	117	40	90	120	0.5	AL+PC
D5Y12R13	12	1080	140	48	110	120	0.5	AL+PC
D6Y15R13	15	1350	180	55	145	120	0.95	AL+PC
D6Y18R13	18	1620	190	55	160	120	0.95	AL+PC
D8Y24R13	24	2160	235	55	205	120	0.95	AL+PC
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)	Driver	IP	Shape	Cover	Working Temp (°C)
3CCT/Tri	220-240	>80	30000	External	20	Round	Frosted	-20--40


TBC



Downlight-27

Model	Power (W)	Lumens (lm)	L (mm)	W (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	PF	Material
D5Y12S27	12	1080	150	150	45	120	120	0.5	AL+PC
D6Y15S27	15	1350	175	175	50	140	120	0.95	AL+PC
D7Y18S27	18	1620	197	197	50	160	120	0.95	AL+PC
D8Y24S27	24	2160	230	230	55	190	120	0.95	AL+PC
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)		Driver	IP	Shape	Cover	Working Temp (°C)
3CCT/Tri	220-240	>80	30000		External	20	Square	Frosted	-25--45

*3CCT = 3000k,4500k,6500k



Downlight-20

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	Material
D3Y12R20	12	780	85	80	75	24	AL
D4Y15R20	15	975	110	115	95	24	AL
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)	Driver	IP	Shape	Working Temp (°C)
3CCT/Tri	220-240	>95	30000	Built In	20	Round	-20--40





Downlight-14

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	Cover	Material
D3Y12R14	12	1200	90	68	75	38	Clear	AL+PC
D4Y18R14	18	1800	110	84	95	38	Clear	AL+PC
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)	Driver	IP	PF	Chip	Working Temp (°C)
3CCT/Tri	220-240	>80	35000	External	20	0.9	COB	-20--50

*3CCT = 3000k,4500k,6500k

CEILING LIGHTS

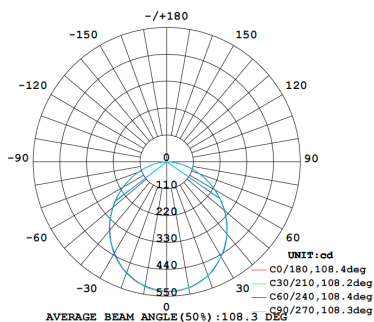

Surface Mounted Ceiling Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Dimmable	Material
R1Y1203	12	1020	>80	174	40	Round	No	AL+PC
R1Y1803	18	1680	>80	225	40	Round	No	AL+PC
R1Y3003	30	2600	>80	300	40	Round	No	AL+PC
R1Y4003	40	3400	>80	400	40	Round	No	AL+PC
S1Y1203	12	1020	>80	174	40	Square	No	AL+PC
S1Y1803	18	1680	>80	225	40	Square	No	AL+PC
S1Y3003	30	2600	>80	300	40	Square	No	AL+PC
E1Y4003	40	3400	>80	300*600	40	Rectangle	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	90-265	120	30000	External	40	0.9	Frosted	-25--45



Round Ceiling Light with Bluetooth Speaker

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
YYCL36Y05	36	2160	>80	400	78	Yes	RGB	PC
YYCL48Y05	48	2880	>80	500	78	Yes	RGB	PC
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Round	85-265	120	30000	Built In	20	0.9	Frosted	-20--50


* Page 20-27 400/500mm ceiling light can be used for this music light.



Round Ceiling Light with Bluetooth Speaker

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
YYCL36Y01	36	2160	>80	400	78	Yes	RGB	PC
YYCL48Y01	48	2880	>80	500	78	Yes	RGB	PC
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Round	85-265	120	30000	Built In	20	0.9	Frosted	-20--50

* Sparkle and non-sparkle covers are available.

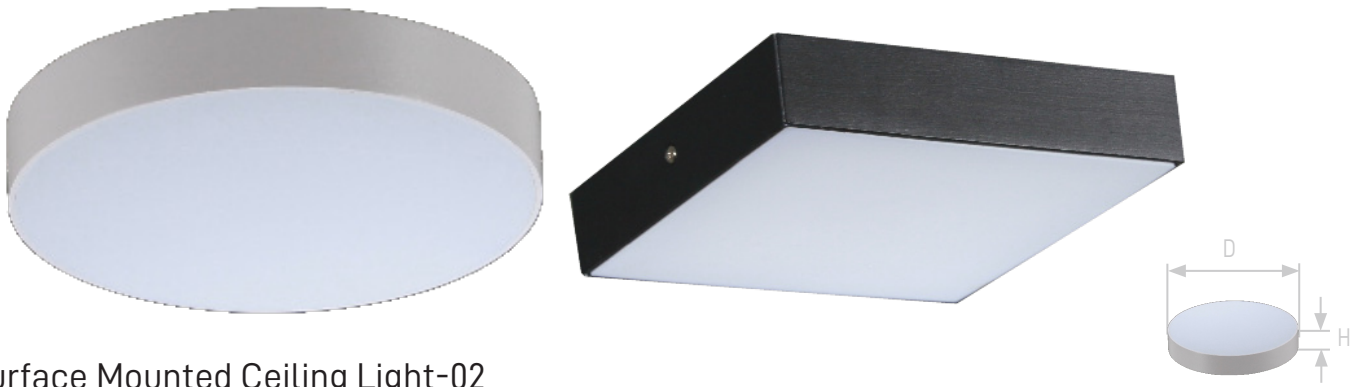

Surface Mounted Ceiling Light-02


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Dimmable	Material
R3Y1503	15	1260	>90	120	40	Round	No	AL+PC
R3Y2403	24	1980	>90	175	40	Round	No	AL+PC
R3Y3003	30	3150	>90	225	40	Round	No	AL+PC
R3Y4203	42	4320	>90	300	40	Round	No	AL+PC
S3Y1503	15	1260	>90	120	40	Square	No	AL+PC
S3Y2403	24	1980	>90	175	40	Square	No	AL+PC
S3Y3003	30	3150	>90	225	40	Square	No	AL+PC
S3Y4203	42	4320	>90	300	40	Square	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	90-265	120	30000	External	40	0.5	Frosted	-25--45



Ceiling Light-07

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Colour	Dimmable	Material
CL07-120-9W	9	810	>90	120	70	Black / White	No	AL+PC
CL07-153-12W	12	1080	>90	153	80	Black / White	No	AL+PC
CL07-170-15W	15	1350	>90	170	90	Black / White	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3CCT/Tri	100-300	120	30000	External	40	0.9	Frosted	-25--45

*3CCT = 3000k,4500k,6500k



Ceiling Light-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Dimmable	Material
CL06-170-18W	18	1620	>80	170	50	Round	No	PC
CL06-255-24W	24	2160	>80	220	50	Round	No	PC
CL06-300-36W	36	3240	>80	300	50	Round	No	PC
CL06S-170-18W	18	1620	>80	170	50	Square	No	PC
CL06S-255-24W	24	2160	>80	220	50	Square	No	PC
CL06S-300-36W	36	3240	>80	300	50	Square	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	100-300	120	30000	Built In	40	0.9	Frosted	-25--45



Ceiling Light IP65-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Dimmable	Material
CL0665-250-18	18	1080	>80	250	60	Round	No	PC
CL0665-370-36	36	2160	>80	370	60	Round	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
4000/6500	185-265	120	30000	Built In	65	0.9	Frosted	-15--50



Ceiling Light-32

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Colour	Material
CL32-110-15	15	1500	>80	110	75	Round	BK/WH/Wood	Steel+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Dimmable	Working Temp (°C)
3CCT/Tri	100-300	120	30000	External	20	0.9	No	-25--45

*3CCT = 3000k,4500k,6500k



Ceiling Light-35

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Dimmable	Material
CL35-190-12W	12+4	840	>80	190	35	Round	No	AL+PC
CL35-245-18W	18+6	1250	>80	245	35	Round	No	AL+PC
CL35S-190-12W	12+4	840	>80	190	35	Square	No	AL+PC
CL35S-245-18W	18+6	1250	>80	245	35	Square	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Tri Tone	100-300	120	30000	External	40	0.9	Frosted	-25--45



Surface Spot Light 01

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	IP	Material
SSP201001	12	960	>80	75	130	20	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Dimmable	PF	Working Temp (°C)
3CCT/Tri	220-240	15 / 30 / 45	30000	BK/WH/SV/GD	No	>0.9	-20--45


*3CCT = 3000k,4500k,6500k



SMC03



SMC04



Surface Mounted Downlight-03


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material
SMC03-12W	12	1200	>85	85	100	No	AL
SMC04-12W	12	1200	>85	85	105	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	PF	Working Temp (°C)
3000/4000/6500	110-265	90	30000	Black/White	44	>0.65	-20--45



Surface Mounted Downlight-06


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material
SMC06-12W	15	1500	>85	100	75	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	PF	Working Temp (°C)
3CCT/Tri	110-265	90	30000	Black/White	44	>0.65	-20--45

*3CCT = 3000k,4500k,6500k



Surface Spot Light 08

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)		H (mm)	Dimmable	Material
SSP441208	12	1200	>85	102		110	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000	110-265	38	50000	Black/White	CREE	20	>0.65	-20--45



Surface Mounted Downlight-10

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Colour	Material
SMC10-15	15	1500	>80	90	75	Round	BK/WH/GD/Grey	Steel+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Dimmable	Working Temp (°C)
3CCT/Tri	100-300	120	30000	External	20	0.9	No	-25--45


*3CCT = 3000k,4500k,6500k



Surface Mounted Downlight-11


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Shape	Colour	Material
SMC11-15	15	1500	>80	90	75	Round	BK/WH	Steel+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Dimmable	Working Temp (°C)
3CCT/Tri	100-300	120	30000	External	20	0.9	No	-25--45

*3CCT = 3000k,4500k,6500k




Surface Spot Light 05

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
SSP201205	7	700	>85	60	60	185	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000/4000	110-265	30	50000	Black/White	CREE	20	>0.65	-20--45



Surface Spot Light 06

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material	
SSP200706	7	700	>85	60	185	No	AL	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000/4000	110-265	24	50000	Black/White	CREE	20	>0.65	-20--45



Surface Mounted Downlight-15


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	W (mm)	H (mm)	Colour	Material
SMC15-1	12	1200	>85	100	100	105	BK/WH	AL
SMC15-2	24	2400	>85	220	100	105	BK/WH	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Dimmable	Working Temp (°C)
3CCT/Tri	100-300	38	30000	External	20	0.9	No	-25--45

*3CCT = 3000k,4500k,6500k



Surface Spot Light 09


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Color Temp (K)	Material
SSP441009	10	800	>90	70	70	100	3CCT	AL
SSP442409	24	1920	>90	163	70	100	3CCT	AL
Dimmable	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
No	110-265	60	30000	Black / White	CREE	20	>0.5	-20--45



Ceiling Light IP55-05

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Shape	Material
CL0555-R300	PLC Bulb	-	>80	300	300	80	Round	PC
CL0555-S270	PLC Bulb	-	>80	270	270	80	Square	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Colour	Working Temp (°C)
-	85-265	120	30000	Built In	55	0.9	Black/Grey	-15--50

* Fitting is with G24 holder




Ceiling Light-40

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL40-500	460	90	120	non sparkle	BK+DW/WH+LW	Acrylic+Metal



Ceiling Light-41

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL41-400	400	138	120	Frosted	Metal
CL41-500	500	138	120	Frosted	Metal



Ceiling Light-17

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL17-350	390	70	120	non sparkle	Acrylic
CL17-450	500	70	120	non sparkle	Acrylic



Ceiling Light-42 Round

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL42-230	280	65	120	Non Sparkle	LW/DW	Acrylic
CL42-350	410	65	120	Non Sparkle	LW/DW	Acrylic
CL42-450	510	75	120	Non Sparkle	LW/DW	Acrylic



Ceiling Light-42 Square

Model	L (mm)	W (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL42S-300	300	300	65	120	Non Sparkle	LW/DW	Acrylic
CL42S-400	400	400	65	120	Non Sparkle	LW/DW	Acrylic
CL42S-500	500	500	75	120	Non Sparkle	LW/DW	Acrylic




Version with wood is available:



Ceiling Light-12 Round

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL12-230	280	60	120	Non Sparkle	BK/WH	Acrylic
CL12-350	390	60	120	Non Sparkle	BK/WH	Acrylic
CL12-450	500	60	120	Non Sparkle	BK/WH	Acrylic



Ceiling Light-12 Square

Model	L (mm)	W (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL12S-400	380	380	65	120	Non Sparkle	BK/WH	Acrylic
CL12S-500	480	480	75	120	Non Sparkle	BK/WH	Acrylic



Ceiling Light-50

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL50-230	260	80	120	Non Sparkle	LW+WH/LW+BK	Acrylic
CL50-350	380	80	120	Non Sparkle	LW+WH/LW+BK	Acrylic
CL50-450	480	80	120	Non Sparkle	LW+WH/LW+BK	Acrylic



Ceiling Light-53

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL53-350	390	70	120	non sparkle	Grey/WH	Acrylic
CL53-450	490	75	120	non sparkle	Grey/WH	Acrylic



Ceiling Light-56

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL56-350	390	75	120	non sparkle	GD/Grey/WH	Acrylic
CL56-450	500	75	120	non sparkle	GD/Grey/WH	Acrylic



Ceiling Light-67

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL67-350	390	80	120	non sparkle	Acrylic




Ceiling Light-68

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL68-350	390	70	120	non sparkle	Acrylic



Version with wood is available:



Ceiling Light-38

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL38-350	390	80	120	non sparkle	GD/Purple/WH/BK	Acrylic
CL38-450	490	70	120	non sparkle	GD/Purple/WH/BK	Acrylic



Ceiling Light-27

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL27-350	390	80	120	Sparkle	GD/WH/Grey	Acrylic
CL27-450	490	80	120	Sparkle	GD/WH/Grey	Acrylic



Ceiling Light-31

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL31-350	390	70	120	non sparkle	Acrylic
CL31-450	500	70	120	non sparkle	Acrylic

Version with wood is available:



Ceiling Light-29

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL29-350	390	70	120	non sparkle	GD/WH	Acrylic
CL29-450	490	70	120	non sparkle	GD/WH	Acrylic

Version with wood is available:



Ceiling Light-01

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL01-230	265	60	120	sparkle/non sparkle	Acrylic
CL01-350	380	60	120	sparkle/non sparkle	Acrylic
CL01-450	480	70	120	sparkle/non sparkle	Acrylic

Version with wood is available:



Ceiling Light-02

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL02-230	270	65	120	Sparkle	Acrylic
CL02-350	390	65	120	Sparkle	Acrylic
CL02-450	490	75	120	Sparkle	Acrylic

Version with wood is available:



Ceiling Light-11

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL11-230	270	80	120	Sparkle	Acrylic
CL11-350	390	90	120	Sparkle	Acrylic
CL11-450	500	100	120	Sparkle	Acrylic



Ceiling Light-36



Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL36-350	390	70	120	sparkle	Acrylic
CL36-450	490	70	120	sparkle	Acrylic

Version with wood is available:



Ceiling Light-09

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL09-230	280	60	120	Sparkle	Acrylic
CL09-350	400	70	120	Sparkle	Acrylic
CL09-450	500	70	120	Sparkle	Acrylic

Version with wood is available:



Ceiling Light-10

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL10-230	260	70	120	non sparkle	Acrylic
CL10-350	390	70	120	non sparkle	Acrylic
CL10-450	490	70	120	non sparkle	Acrylic



Ceiling Light-33

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL33-350	390	80	120	non sparkle	Acrylic
CL33-450	490	80	120	non sparkle	Acrylic



Square Ceiling Light-08

Model	L (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL08S-340	330	50	120	Sparkle	Acrylic
CL08S-420	430	50	120	Sparkle	Acrylic



Ceiling Light-72

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Colour	Material
CL72-350	390	80	120	non sparkle	LW/DW	Acrylic





Version with wood is available:



Ceiling Light-05


Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL05-300	300	50	120	Frosted	Wood
CL05-400	400	50	120	Frosted	Wood
CL05S-300	300	50	120	Frosted	Wood
CL05S-400	400	50	120	Frosted	Wood



Ceiling Light-15 Metal

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL15M-400	400	50	120	Frosted	Metal



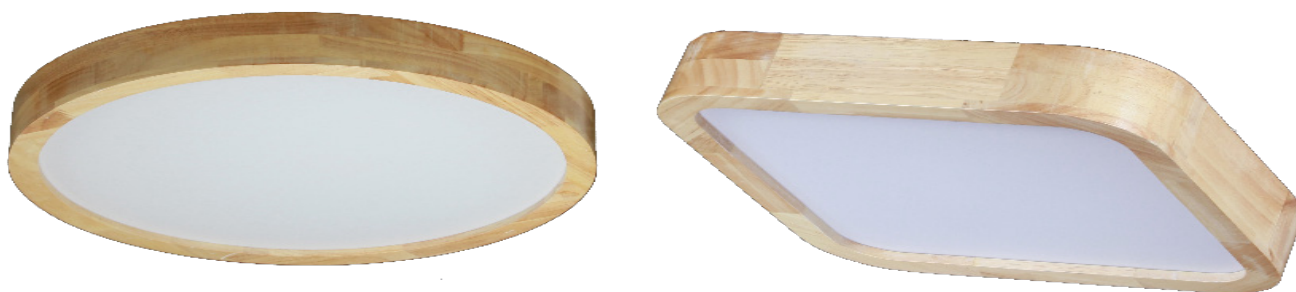

Ceiling Light-15

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL15-300	300	60	120	Frosted	Wood
CL15-400	400	60	120	Frosted	Wood
CL15-500	500	60	120	Frosted	Wood
CL15S-300	300	60	120	Frosted	Wood
CL15S-400	400	60	120	Frosted	Wood
CL15S-500	500	60	120	Frosted	Wood



Ceiling Light-16

Model	D (mm)	H (mm)	Beam Angle(°)	Cover	Material
CL16-400	400	60	120	Frosted	Wood
CL16-500	500	60	120	Frosted	Wood
CL16S-400	400	60	120	Frosted	Wood
CL16S-500	500	60	120	Frosted	Wood




Ceiling Light-44



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Color Temp (K)	Material
CL44-900-36	36	3600	>80	900	220	60	3CCT/Tri	Wood+PC
Colour	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Wood	100-240	120	30000	Built In	20	0.9	Frosted	-20--45

* 3CCT = 3000k,4500k,6500k

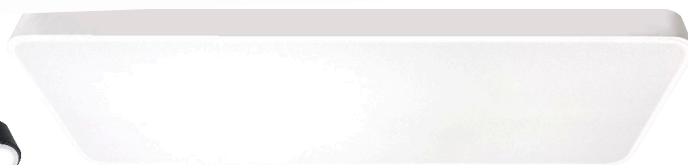

Ceiling Light-26



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Color Temp (K)	Material
CL26-900-40	40	3600	>80	900	300	60	3CCT/Tri	ST+PC
CL26-1200-50	50	4500	>80	1200	300	60	3CCT/Tri	ST+PC
Colour	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
White/Black/Wood	100-240	120	30000	Built In	20	0.9	Frosted	-20--50


* Pendant Hanging is available.

* 3CCT = 3000k,4500k,6500k



Ceiling Light-43

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
CL43-450-36	36	3240	>80	450	190	No	Tri Tone	PC
CL43-630-48	48	4320	>80	630	240	No	Tri Tone	PC
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Round	85-265	120	30000	Built In	20	0.9	Frosted	-20--50

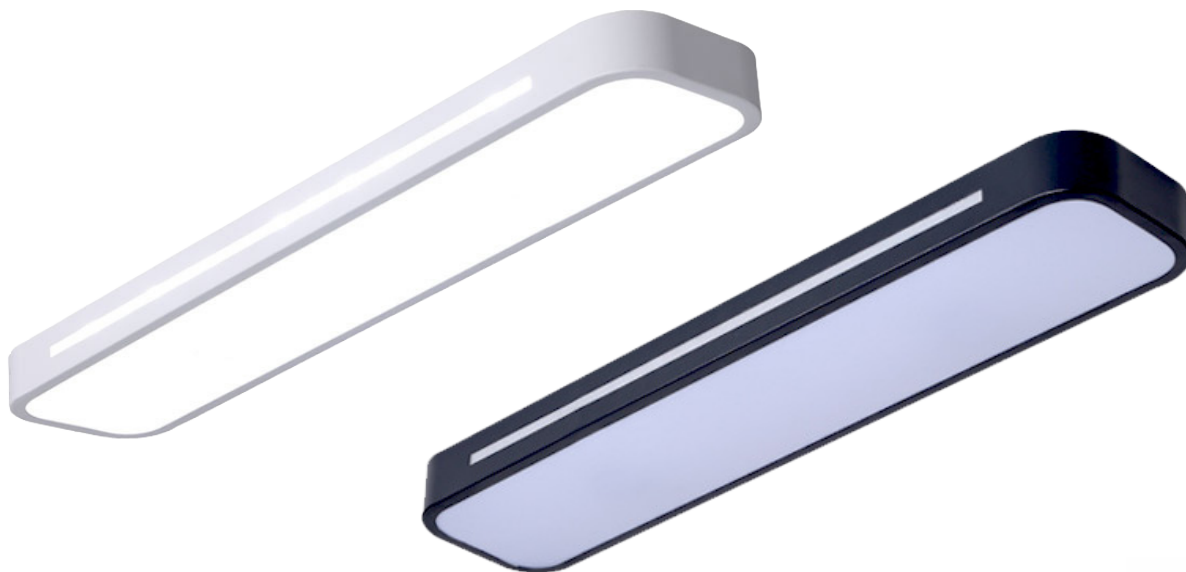

Long Ceiling Light-09

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
CCL09	36	3600	>80	780	135	50	ST+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	Dimmable	Working Temp (°C)
3CCT/Tri	100-240	120	30000	Black/White	20	No	-20--45

*3CCT = 3000k,4500k,6500k




Ring Ceiling Light-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Height (mm)	Base (mm)	Dimmable	Material
CCL01-1	35	2450	>85	500	85	550xH45	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Black/White/Gold	2835	20	>0.65	-20--45



Gold Ceiling Light with Spot Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	Height (mm)	Base (mm)	Dimmable	Material
CCL06	10 + Gu10	800	>85	200	L570xW80	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Gold	20	>0.65	-20--45

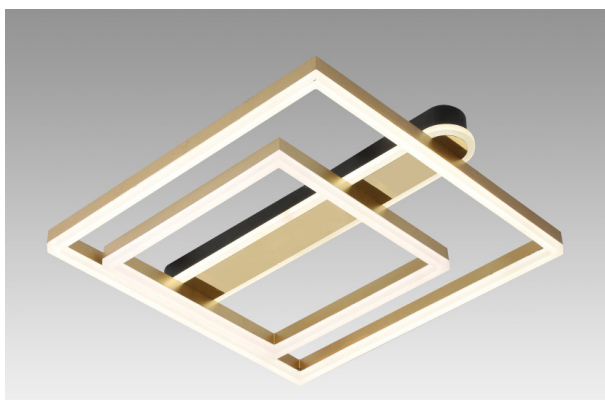

Square Gold Ceiling Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	Size (mm)	Height (mm)	Base (mm)	Dimmable	Material
CCL08S	50	4000	>85	500x500/340x340	85	L570xW80	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Gold	2835	20	>0.65	-20--45



Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Height (mm)	Base (mm)	Dimmable	Material
CCL02-1	35	2450	>85	500	85	300xH45	No	AL+PC
CCL02-2	50	3500	>85	300+500	140	300xH45	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Black/White/Gold	2835	20	>0.65	-20--45





Ring Ceiling Light-03

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Height (mm)	Base (mm)	Dimmable	Material
CCL03-1	35	2450	>85	400	80	300xH45	No	AL+PC
CCL03-2	50	3500	>85	260+400	140	300xH45	No	AL+PC
CCL03-3	60	4200	>85	260+330+400	180	300xH45	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	White	2835	20	>0.65	-20--45








Cartoon Ceiling Light-04

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Height (mm)	Dimmable	Material	
CCL04-Dolphin	35	2450	>85	400	85	No	AL+PC	
CCL04-Dinosaur	35	2450	>85	400	85	No	AL+PC	
CCL04-MoonStar	35	2450	>85	400	85	No	AL+PC	
CCL04-Star	35	2450	>85	400	85	No	AL+PC	
CCL04-Love	35	2450	>85	400	85	No	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Gold	2835	20	>0.65	-20--45




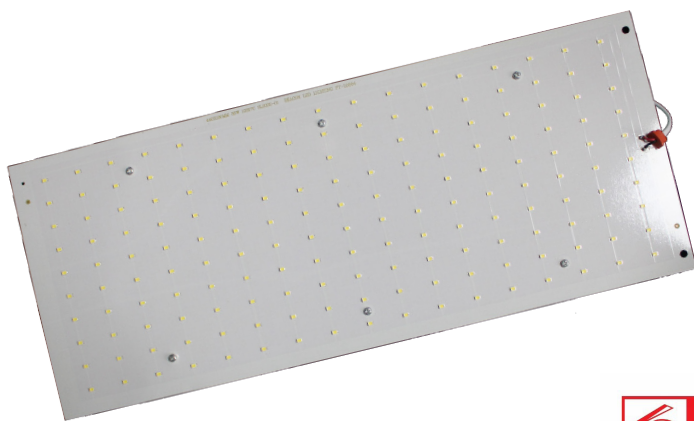


Rectangle LED Light Plate

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	PF	Color Temp (K)
LP35NS01	35	3500	>80	440	180	20	0.95	6500
LP35NS01	35	3500	>80	440	180	20	0.95	3CCT/Tri
Material	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver		IP	Cover	Working Temp (°C)
AL	185-265	180	30000	External		20	Clear	-30--40

*3CCT = 3000k,4500k,6500k

LIGHT PLATES

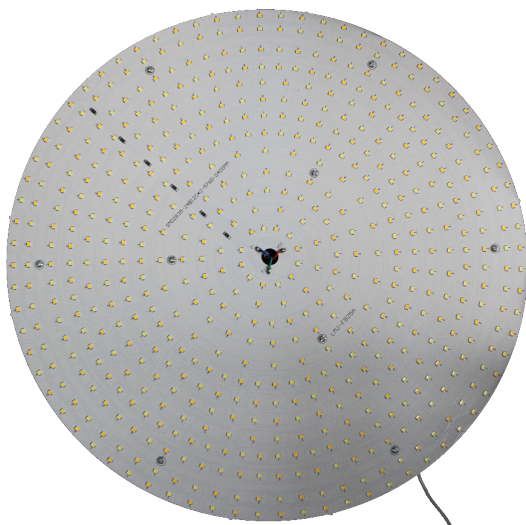

Round LED Light Plate


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	PF	Color Temp (K)
C1Y36NNS05	36	4680	>80	300	20	0.95	6500/3CCT/Tri
C1Y48NNS05	48	6240	>80	400	20	0.95	6500/3CCT/Tri
Material	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	Cover	Working Temp (°C)
AL	185-265	180	40000	External	20	Clear	-30--40

*3CCT = 3000k,4500k,6500k





Round Light Plate-04

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Remote Controller	Color Temp (K)	Material
LPR16N04	16	1280	>80	148	30	No	3000/6500	AL+PC
LPR26N04	26	2080	>80	198	30	No	3000/6500	AL+PC
LPR36N04	36	2880	>80	248	30	No	3000/6500	AL+PC
LPR40N04	40	3200	>80	315	30	No	Tri Tone	AL+PC
LPR40N04	40	3200	>80	315	30	Yes	Tri Tone	AL+PC
LPR48N04	48	3200	>80	375	30	No	3000/6500/Tri	AL+PC
LPR48N04	48	3200	>80	375	30	Yes	3 Tri Tone	AL+PC
Voltage (VAC)	Beam Angle(°)		Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
175-265	180		8000	Built In	20	0.5	Clear	-30--40

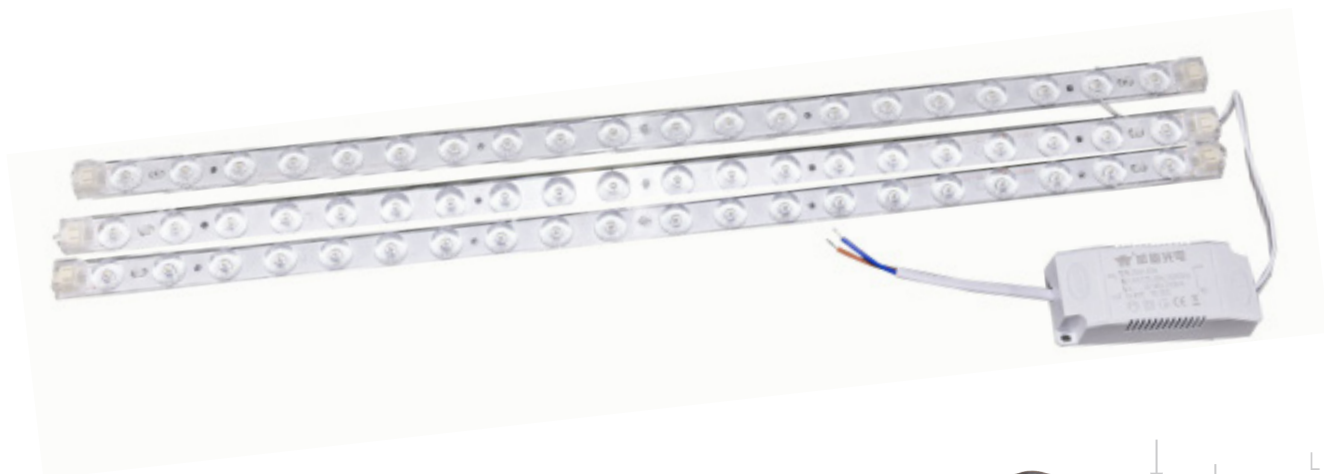

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	H (mm)	Number of LED Strip	Color Temp (K)	Material
LPL32N03	32	2560	>80	400	30	4	6500/Tri	AL+PC
LPL40N03	40	3200	>80	500	30	4	6500/Tri	AL+PC
LPL60N03	48	3840	>80	400	30	6	Tri Tone	AL+PC
Dimmable	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
No	175-265	180	15000	Built In	20	0.5	Clear	-30--40

Applications In Ceiling Fan Lights:



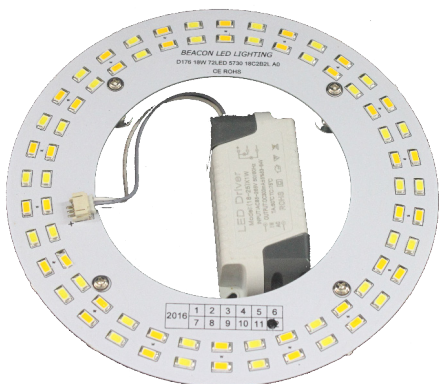


Small Round Light Plate

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	PF	Material
RGB24NNS01	24	240	>80	145	22	0.95	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	Led	Working Temp (°C)
Tri Tone	185-265	120	30000	External	20	2835	-30--40

* Center hole is 60mm.

PANEL LIGHTS

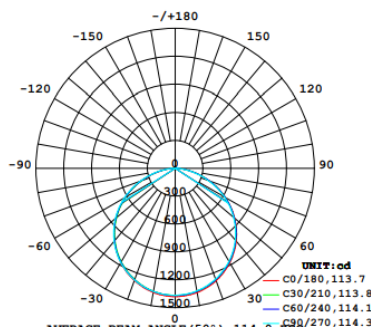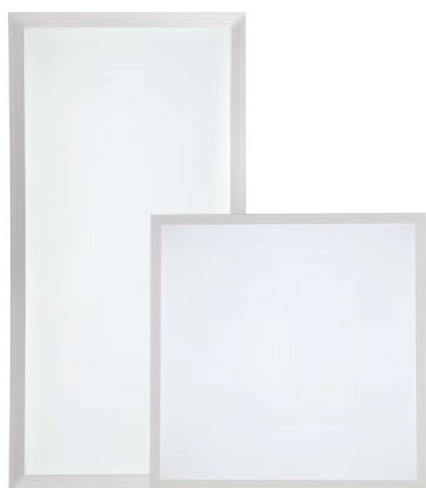

Panel Light-03



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable*	Material
PL03032003	20	3000	>80	295	295	50	No	AL+PS
PL06064003	40	6000	>80	595	595	50	No	AL+PS
PL03063003	30	4500	>80	595	295	50	No	AL+PS
PL03124003	40	6000	>80	1195	295	50	No	AL+PS
PL06128003	80	12000	>80	1195	595	50	No	AL+PS
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3CCT/Tri	100-265	120	50000	External	20	0.9	Frosted	-25--45



* Dali Dimming, 0/1-10v Dimming, and Triac Dimming are available.

* 3CCT = 3000k,4500k,6500k

* Surface Mounted Frame is available.







T8 (PC) Tube



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	Base	Dimmable	Material
T8Y08PC	8	1040	>80	588	28	G13	No	AL+PC
T8Y18PC	18	2340	>80	1198	28	G13	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	>0.9	Frosted	-25--45




T8 (AL+PC) Extreme Bright Tube



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	Base	Dimmable	Material
T8Y10NL05	10	1300	>80	588	28	G13	No	AL+PC
T8Y14NL05	14	1800	>80	1198	28	G13	No	AL+PC
T8Y18NL05	18	2340	>80	1198	28	G13	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	>0.9	Frosted	-25--45





T8 (AL+PC) Microwave Sensor Tube



Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	Base	Standby (W)	Material
T8Y10YL01	10	1000	>80	588	28	G13	2.5	AL+PC
T8Y18YL01	18	1850	>80	1198	28	G13	3.6	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	>0.9	Frosted	-25--45

*Standby Brightness and fully turn off version is available.





T5 (PC) Tube

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	Base	Dimmable	Material
T5Y08PC	8	1040	>80	549	22	G5	No	AL+PC
T5Y18PC	18	2340	>80	1149	22	G5	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	>0.9	Frosted	-25--45





PLL Tube (2G11 Tube)

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
PLL18NC02	18	1800	>80	410	42	24	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Base	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	>0.9	2G11	-25--45

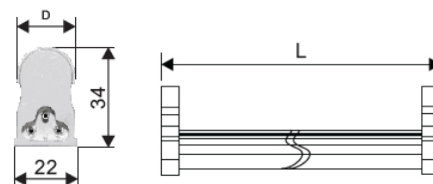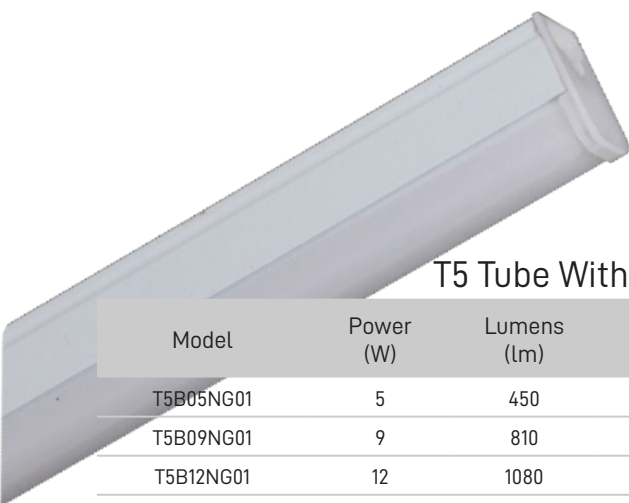

T5 Tube With Bracket

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	H (mm)	Dimmable	Material
T5B05NG01	5	450	>80	267	22	34	No	AL+PC
T5B09NG01	9	810	>80	567	22	34	No	AL+PC
T5B12NG01	12	1080	>80	872	22	34	No	AL+PC
T5B16NG01	16	1440	>80	1172	22	34	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	185-265	120	35000	Built In	20	0.5	Frosted	-25--45

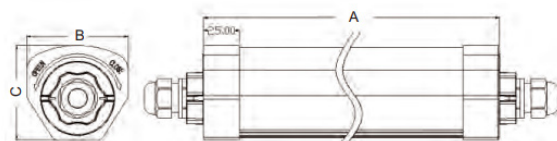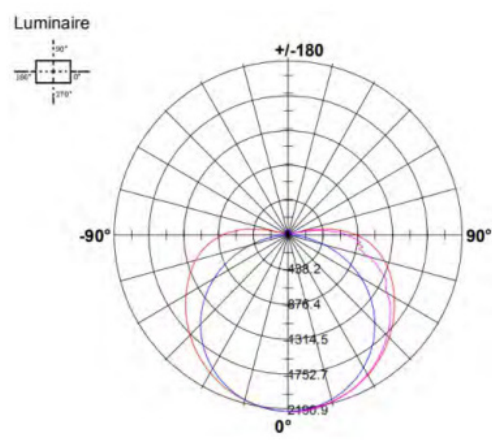


Tri-proof Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	A (mm)	B (mm)	C (mm)	Dimmable	Material
LL06H18	18	2340	>80	600	67	65	No	PC
LL12H36	36	4680	>80	1200	67	65	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	180-277	120	50000	Built In	65	>0.9	Frosted	-25--45


*Built in sensor version is available.

TUBE LIGHT FITTING

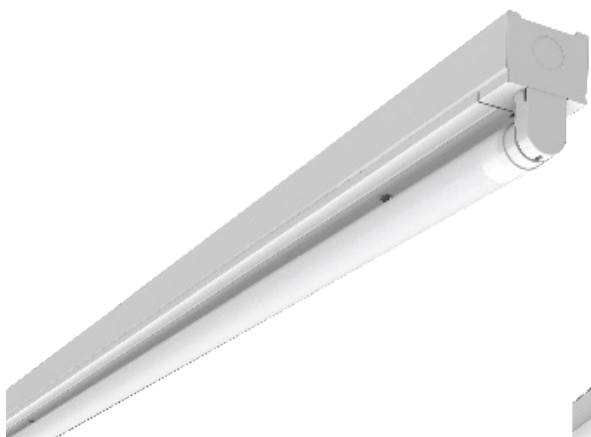


Bare Batten Fitting

Model	L (mm)	W (mm)	H (mm)
1-2FT-T8BF	612	52	77
2-2FT-T8BF	612	102	82
1-4FT-T8BF	1222	52	77
2-4FT-T8BF	1222	102	82

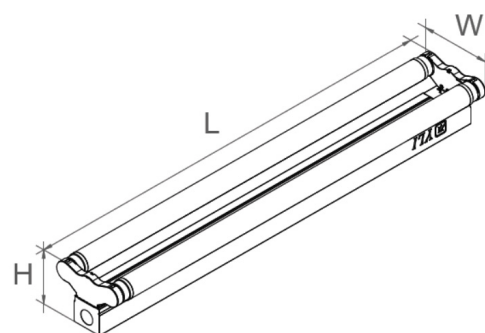

Weatherproof Fitting

Model	L (mm)	W (mm)	H (mm)
1-2FT-T8WF	660	65	80
2-2FT-T8WF	660	105	80
1-4FT-T8WF	1260	65	80
2-4FT-T8WF	1260	105	80

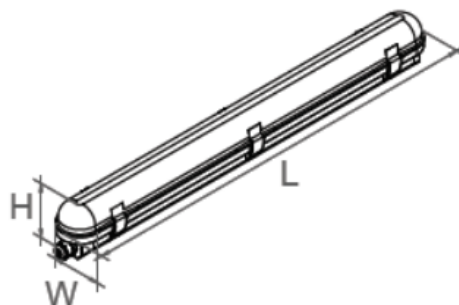


TUBE LIGHT FITTING




Mirror Louver Fitting (Recessed)

Model	Dimension (mm) Imperial Size L x L2 x W	Dimension (mm) Metric Size L x L2 x W
2-2FT-T8TF01	614x604x604	614x595x595
3-2FT-T8TF01	614x604x604	614x595x595
1-4FT-T8TF01	1223x1213x302	1223x1195x298
2-4FT-T8TF01	1223x1213x302	1223x1195x298
2-4FT-T8TF01	1223x1213x604	1223x1195x595
3-4FT-T8TF01	1223x1213x604	1223x1195x595

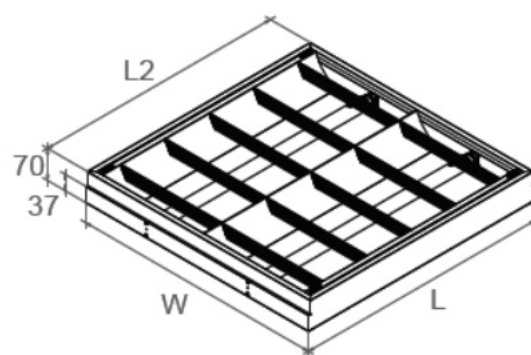

Mirror Fitting (Surface Ceiling)

Model	Dimension (mm) L x W
2-2FT-T8SF	614x604
3-2FT-T8SF	614x604
2-4FT-T8SFN	1223x302
2-4FT-T8SF	1223x604
3-4FT-T8SF	1223x604

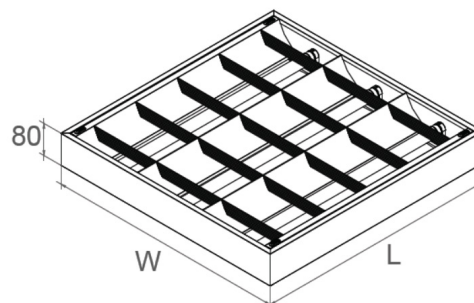

EMERGENCY POWER KIT



BLL-1230L



BLL-6030L

Model	BLL-6030L-1.5Ah	BLL-1230L-1.5Ah
Power	10-50W (10-80V)	10w
Frequency	50/60Hz	50/60Hz
Battery	Ni-Cd 6V 1.5Ah	Ni-Cd 12V 1.5Ah
Charge Time	24 Hours	24 Hours
Emergency Time	1.5 Hours	1.5 Hours
Operating Temp (°C)	0--50	0--50
IP	20	20
Dimension Of Inverter	29x40x206mm	29x40x206mm
Light Source	10-50W LED with External Driver	10W LED
Emergency Power	MAX 6W	90%
Work Mode	Maintain / Non-maintain	Maintain / Non-maintain
Indicator Light	Green for power Yellow for charging	Green for power Yellow for charging
Test Button	Yes	Yes
Protection	Overcharge / Over-discharge	Overcharge / Over-discharge
Housing Material	Plastic	Plastic
Battery & Inverter	Seperate	Seperate

Connection Diagram BLL-1230L




BLL-6030L





MC030S L On/Off Function Smart Version

Function	On/off Smart Version
Operating Voltage	220~240VAC (50/60Hz)
Rated Load	400W(Inductive)
Standby Power	≤0.1W
Mounting Height	6m max
Detection Radius	4~6m
Detecting Angle	Ceiling Mount 150°
Operating Temp (°C)	-25~+60
IP	20
Applicable	LED Light

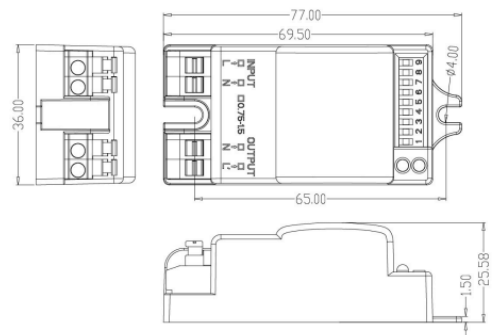

Introduction

MC030SL is an innovative and active motion detector with HF system 5.8GHZ. Motion can be detected through plastic, glass and thin non-metal material.

The sensor supplies a simple energy-saving solution to use light only when and where you need. It automatically switches on/off light based on motion and ambient light level. It can control all kinds of lights, for example: halogen, fluorescent, and LED lights.

The high quality relay is particularly suitable for commercial use with switching power up to 400W for LEDs and fluorescent lamps and up to 800W for incandescent lights

Features

- Automatically switching based on motion and light level.
- Zero-crossing point operation helps to protect the sensor against in-rush current.
- Super compact size make it suitable to be fixed within most luminaires.
- 4 pole press-in terminal (L,N,N,L) is very easy to install.
- Detection area, time delay and daylight threshold can be precisely set via DIP switch.
- Wide detection area range, up to 12m diameter.
- Hold time: 5s ~ 30 min.



On/Off Function Smart Version MSA001S (Surface) / MSA001R (Recessed)

Function	On/off Smart Version
Operating Voltage	198-264V AC 50Hz/60Hz
Rated Load	800W (Resistive), 400W (Inductive)
Standby Power	≤0.5W
Mounting Height	2.5-4m
Operating Temp (°C)	-25--50
IP	20
Applicable	LED Light

Features

- Low impedance sensor antenna patent helps anti-interference of kinds wireless signal like 5G, Wi-Fi, Bluetooth, etc.
- Parameters can be set by DIP switch.
- Compact size for Independent flush mounting.
- Switching power supply design, complies with ERP directive.
- Hold time: 5S/1Min/5Min/10Min.




MC040S On/Off Function Smart Version

Function	On/off Smart Version
Operating Voltage	220~240VAC (50/60Hz)
Rated Load	400W(Inductive) 800W (Resistive)
Standby Power	≤1W
Mounting Height	6m max
Operating Temp (°C)	-25--55
IP	20
Applicable	LED Light

Features


- Automatically switching based on motion and light level.
- Zero-crossing point operation helps to protect the sensor against in-rush current.
- 4 pole press-in terminal (L,N,N,L) , easy to assemble.
- Detection area, time delay and daylight threshold can be precisely set via DIP switch.
- Wide detection area range, up to 12m diameter.
- Hold time: 5s ~ 30 min.
- Applicable for wall installation & ceiling installation.

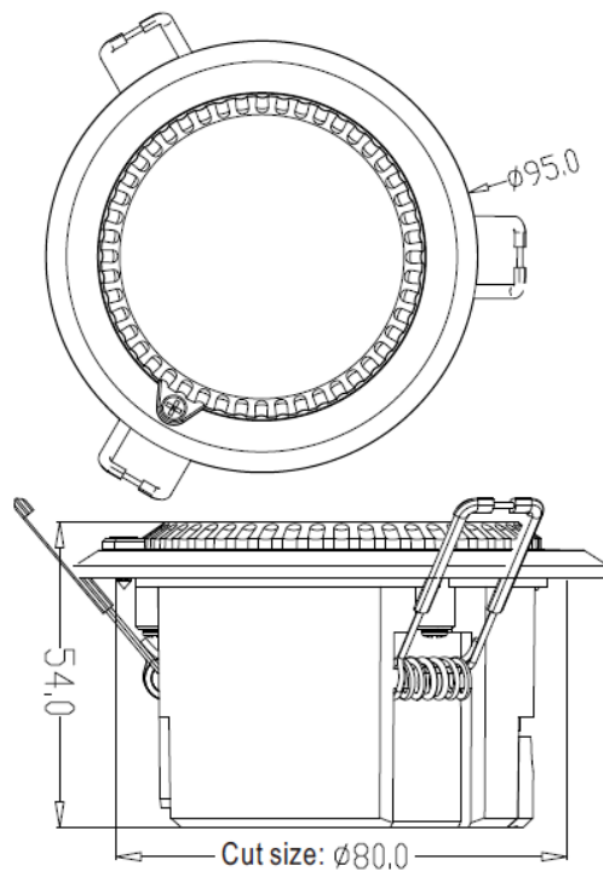



amazon Alexa

Google Home



SMART LED Light

Model	Power (W)	Voltage (VAC)	H (mm)	D (mm)	Beam Angle(°)	Base	Color Temp (K)
SMART A60-9T	9	175-265	118	60	210	E27	Multiple colour
SMART GU10-5T	5	175-265	59	50	120	GU10	Multiple colour
Material	Dimmable	Lifespan (hrs)	Driver	IP	PF	CRI (Ra)	Working Temp (°C)
PC	Yes	20000	Built In	20	0.5	>80	-25--45

SMART LIGHTS



amazon Alexa

Google Home



SMART Touch Wall Switch

Model	Channel	Input / Output Voltage(VAC)	W (mm)	L (mm)	H (mm)	Input Current	Single Switch Max Load (W)	Wifi
Smart-SW-1	1	100-240	88	88	38	10A	<800	2.4GHz
Smart-SW-2	2	100-240	88	88	38	10A	<800	2.4GHz
Smart-SW-3	3	100-240	88	88	38	10A	<800	2.4GHz



amazon Alexa

Google Home



SMART Downlight-2

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	Material
Smart DL-1	9	650-850	115	70	85	100	AL+PC
Smart DL-2	12	850-1050	145	70	115	100	AL+PC
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)	Driver	IP	PF	Working Temp (°C)
Multiple colour	220-240	>80	30000	External	44	0.9	-20--45




amazon Alexa


Google Home



SMART Downlight-1

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Cut Hole (mm)	Beam Angle(°)	Material
D4Y12RCC	12	850-1050	110	40	90	100	AL+PC
Color Temp (K)	Voltage (VAC)	CRI (Ra)	Lifespan (hrs)	Driver	IP	PF	Working Temp (°C)
Multiple colour	220-240	>80	30000	External	44	0.9	-20--45



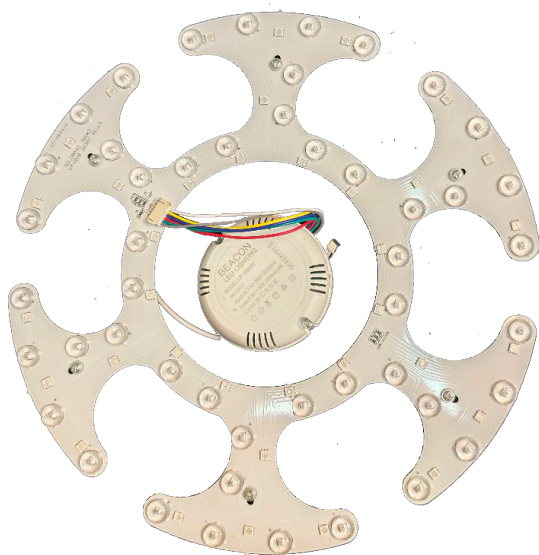

amazon Alexa

Google Home




SMART LED Light Plate

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
Smart-LP36-320T02	36	1920	>80	330	30	Yes	Multiple colour	Metal
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	CRI (Ra)	Working Temp (°C)
Round	85-265	120	20000	External	20	0.65	>80	-20--50



amazon Alexa

Google Home




SMART LED Light Plate

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
Smart-LP36-400T01	36	2880	>80	400	50	Yes	Multiple colour	Metal
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	CRI (Ra)	Working Temp (°C)
Round	85-265	120	20000	External	20	0.65	>80	-20--50



PLC LIGHTS



LED PLC Tube -02 (One Side)

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Base	Dimmable	Material
PLC06NC02	6	530	>80	125	35	35	G24	No	AL+PC
PLC09NC02	9	810	>80	150	35	35	G24	No	AL+PC
PLC13NC02	13	1140	>80	165	35	35	G24	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF		Cover	Working Temp (°C)
3000/4000/6500	85-265	120	35000	Built In	20	0.9		Clear	-25--45


CORN LAMPS




Corn Lamp

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	N.W. (g)	Base	LED
CL12N10	12	1560	>80	50	145	145	E27	SMD
CL25N10	25	3250	>80	64	207	550	E27	SMD
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Material	Working Temp (°C)
3000/6500	85--265	360	35000	Built In	20	0.95	AL+PC	-25--45

LIGHT BULBS




Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Cover
C35E14N4	4	440	>80	35	100	E14	No	Clear
C35E14Y4	4	440	>80	35	100	E14	Yes	Clear
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Material	Working Temp (°C)
2700/6500	185-265	360	20000	Built In	20	0.5	Glass	-25--45



G95 Filament/SMD Bulb

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	LED	Dimmable	Material
G95-12	12	1320	>80	95	138	SMD	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Base	Working Temp (°C)
3000/6500	185-265	360	20000	Built In	20	0.5	E27	-25--45



SMD Bulb

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
B1Y30ENY01	30	3000	>80	100	157	E27	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/6500	170-265	180	35000	Built in	20	0.5	Frosted	-25--45



SMD Bulb-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
B1Y09ENA01	9	900	>80	60	120	E27	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Tri Tone	175-265	200	35000	Built In	20	0.5	Frosted	-25--45



Candle Light SMD Bulb

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Cover
B1Y05E14NA02	5	400	>80	32	130	E14	No	Clear
B1Y05E27NA02	5	400	>80	32	130	E27	No	Clear
B1Y12E14NA02	12	960	>80	32	130	E14	No	Clear
B1Y12E27NA02	12	960	>80	32	130	E27	No	Clear
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Material	Working Temp (°C)
Tri Tone	185-265	360	20000	Built In	20	0.5	Glass	-25--45



SMD Bulb With Adjustable Spot Effect

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
B1Y10ENA03	10	1000	>80	60	110	E27	No	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000k	175-265	Adjustable Spot	25000	Built In	20	0.5	Frosted	-25--45



ST64 LED Filament Bulb

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
ST64E27N8	8	880	>80	64	140	E27	No	Glass
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
2700	185-265	360	20000	Built In	20	0.5	Clear	-25--45



Filament




SMD



G45 Filament/SMD Bulb

Model	Power (W)	Lumens (lm)	D (mm)	H (mm)	Base	LED	Color Temp (K)	Material
G45E27N4	4	440	45	68	E27	Filament	2700/6500	Glass
G45E27N7	7	700	45	68	E27	SMD	Tri Tone	Glass
Dimmable	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	CRI (Ra)	Working Temp (°C)
No	185-265	360	20000	Built In	20	0.5	>80	-25--45



A60 Filament Bulb

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Cover
A60E27N6	6	660	>80	60	97	E27	No	Clear
A60E27Y6	6	660	>80	60	97	E27	Yes	Clear
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Material	Working Temp (°C)
2700/6500	185-265	360	20000	Built In	20	0.5	Glass	-25--45




STRIP LIGHTS




Flexi Curve Strip 2835

Model	Power (W/m)	Voltage (VDC)	IP	WxH (mm)	LED Chip	LEDs/m	Lumen (lm/m)	Color Temp (K)	Remark
S262012S	7.2	12	20	6x1.2	2835	60	840	2800	-
Length (m/Roll)	Lifespan (hrs)	Beam Angle(°)		Cuttable Length	CRI (Ra)	Working Temp (°C)		Dimmable	
5	50000	120		Every 3 LEDs	>90	-25--45		Yes	

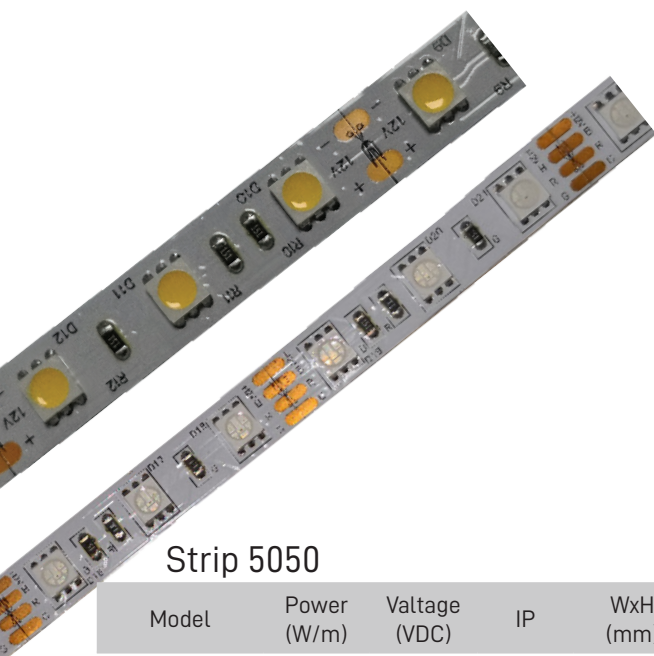

Strip 5050

Model	Power (W/m)	Voltage (VDC)	IP	WxH (mm)	LED Chip	LEDs/m	Lumen (lm/m)	Color Temp (K)	Remark
S56201201	14.4	12	20	10x2	5050	60	1320	2800/3000/4200/6500	-
S56201201	14.4	12	20	10x2	5050	60	-	Red/Green/Blue/RGB	-
S56201201	14.4	12	20	10x2	5050	60	-	RGB+W	-
S56671201	14.4	12	67	12.5x4	5050	60	1320	2800/3000/4200/6500	-
S56671201	14.4	12	67	12.5x4	5050	60	-	RGB	-
S56681201	14.4	12	68	12.5x4	5050	60	1320	2800/3000/4200/6500	-
S56202401	14.4	24	20	10x2	5050	60	1320	2800/3000/4200/6500	-
S566724PS	14.4	24	67	12.5x4	5050	60	-	RGB (IC-Dream color)	Programmer Strip
Length (m/Roll)	Lifespan (hrs)		Beam Angle(°)	Cuttable Length	CRI (Ra)	Working Temp (°C)	Dimmable		
5	50000		120	Every 3 LEDs	>90	-25--45	Yes		

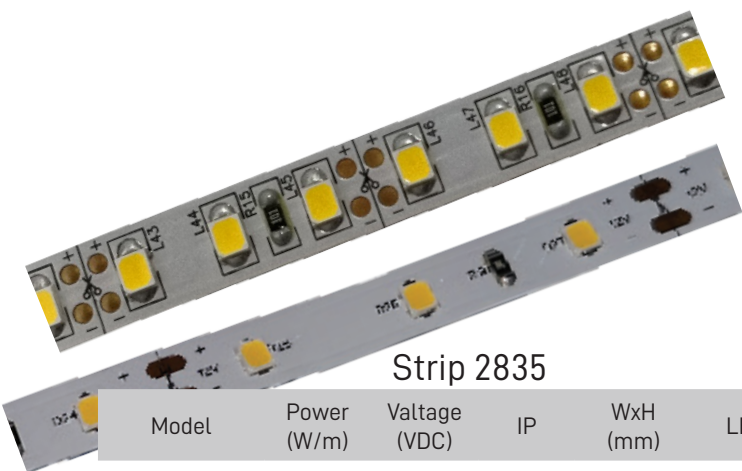

Strip 2835

Model	Power (W/m)	Voltage (VDC)	IP	WxH (mm)	LED Chip	LEDs/m	Lumen (lm/m)	Color Temp (K)	Remark
S26201201	7.2	12	20	8x1.2	2835	60	840	2800/4200/6500	-
S26671201	7.2	12	67	11x4	2835	60	840	2800/4200/6500	-
2E21	12	12	20	8x1.2	2835	120	1080	2800/4200/6500	-
S2E201201	14.4	12	20	8x1.2	2835	120	1680	2800/3000/4200/6500	-
S2E202401	14.4	24	20	8x1.2	2835	120	1680	2800/3000/4200/6500	-
S2E202402	14.4	24	20	5x1.2	2835	120	1680	2800/3000/4200/6500	-
S2E671201	14.4	12	67	11x4	2835	120	1680	2800/4200	-
S2E672401	14.4	24	67	11x4	2835	120	1680	2800/4200	-
Length (m/Roll)	Lifespan (hrs)		Beam Angle(°)		Cuttable Length	CRI (Ra)		Working Temp (°C)	Dimmable
5	50000		120		Every 3 LEDs	>90		-25--45	Yes



COB Strip Light

Model	Power (W/m)	Voltage (VDC)	IP	WxH (mm)	LED Chip	LEDs/m	Lumen (lm/m)	Color Temp (K)	Remark
SCB201203	9	12/24	20	8x1.6	COB	480	1260	2700/3000/4000/6000	-
SCB671203	9	12	67	10x4.5	COB	480	1260	3000/4000/6000	-
SCB681203	9	12	68	10x3.5	COB	480	1260	3000	-
SCB202403	9	24	20	8x1.6	COB	480	1260	3000/4000/6000	-
SCB202403	15	24	20	10x1.6	COB	480	1260	Tri Tone	-
SCB202403	15	24	20	8x1.6	COB	840	-	RGB	-
SCB672403	9	24	67	10x4.5	COB	480	1260	3000/4000/6000	-
SCB682403	9	24	68	10x3.5	COB	480	1260	3000	-
Length (m/Roll)	Lifespan (hrs)		Beam Angle(°)		Cutttable Length	CRI (Ra)	Working Temp (°C)		Dimmable
5	50000		120		25mm	>90	-25--45		Yes



Neon Strip Light-05

Model	Power (W/m)	Voltage (VDC)	IP	Max Length per Input (m)	LEDs/m	Lumen (lm/m)	Dimmable	Cuttable Length
NS0410-12	7.2	12	65	10	120	200	Yes	50mm
Length (m/Roll)	Lifespan (hrs)	Beam Angle(°)	WxH (mm)	CRI (Ra)	Working Temp (°C)	Color Temp (K)		
5	35000	120	4x10	>90	-25--45	3000/4000/6500		



Neon Strip Light-07

Model	Power (W/m)	Voltage (V)	IP	Max Length per Input (m)	LEDs/m	Lumen (lm/m)	Dimmable	Cuttable Length
NS0712-240	8	240	65	50	120	420	No	200mm
Length (m/Roll)	Lifespan (hrs)	Beam Angle(°)	WxH (mm)	CRI (Ra)	Working Temp (°C)	Color Temp (K)		
50	35000	120	7x12	>90	-25--45	3000		



Module-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
MOD2835-1.2	1.2	130	>70	67	16	5	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	LED	Cover	Working Temp (°C)
3000/6500	DC12V	160	35000	Extenal	20	5730	Frosted	-40--50



Module-02


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
MOD5730-1	1	100	>70	36	21	8.1	No	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	LED	Cover	Working Temp (°C)
3000/6500	DC12V	180	35000	Extenal	65	OSRAM 2835	Frosted	-40--50



DC On Off Sensor (for cabinet)

Model	DC-Sensor
Description	Sensor for cabinet
Input Voltage (VDC)	12-24
Output Voltage (VDC)	12-24
Output Power	<5A
L*W*H (mm)	27x31x12
Sensor Distance	3-8cm

STRIP LIGHT CONNECTORS (WITHOUT SOLDERING)




SMD Gapless

Model	Applications	IP
B2P08	SMD3528 & 2835	20
B2P10	SMD5050	20

RGB Gapless

Model	Applications	IP
B4P10	RGB5050	20





SMD 18cm Extension

Model	Applications	IP
C2P08	SMD3528 & 2835	20
C2P10	SMD5050	20

RGB 18cm Extension

Model	Applications	IP
C4P10	RGB5050	20

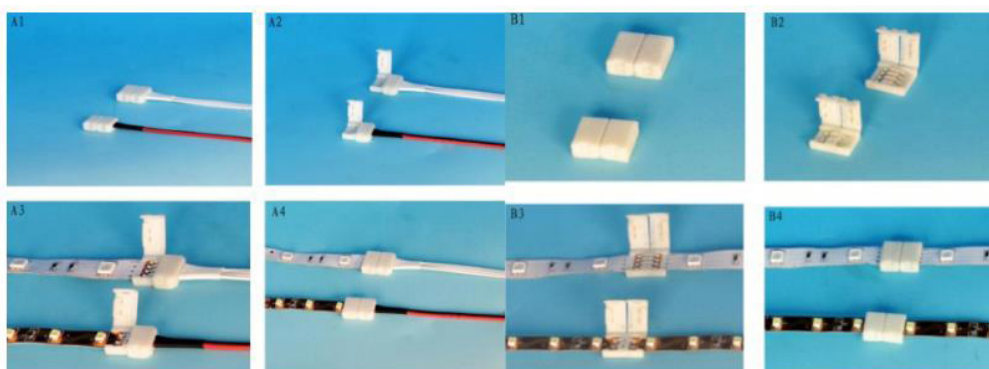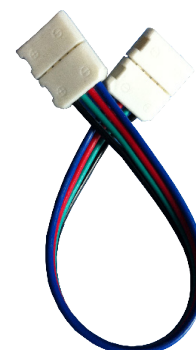

HW7224E01

LED Strip Light Remote Controllers

Model	HW7224E01
Description	24 Key Infrared LED Controller
Input Voltage (VDC)	5-24
Output Voltage (VDC)	12-24
Output Power	<6A
L*W*H (mm)	63x35x22
Output Channel	3
Control Mode	Infrared
Remote Control Distance	8-10m
Suitable Strip	RGB



LED Programmer Strip Light Remote Controller

Model	SP103E
Description	17 Key Wireless LED CProgrammer Strip Controller
Input Voltage (VDC)	12-24
Output Voltage (VDC)	12-24
Output Power	<12A
L*W*H (mm)	84x38x5
Output Channel	4
Control Mode	Wireless
Remote Control Distance	20-30m
Suitable Strip	RGB Programmer Strip





SD9601E01



WX-CTL-SGL

LED Strip Light Dimmers

Model	SD9601E01	WX-CTL-SGL
Description	Manual Control LED Dimmer	3 Key Wireless Control LED Dimmer
Input Voltage (VDC)	5-24	12-24
Output Voltage (VDC)	12-24	12-24
Output Power	<8A	<12A
L*W*H (mm)	89x59x35	80x64x24
Output Channel	1	1
Control Mode	Manual	Wireless
Remote Control Distance	-	15-20m
Suitable Strip	Pure Color	Pure Color

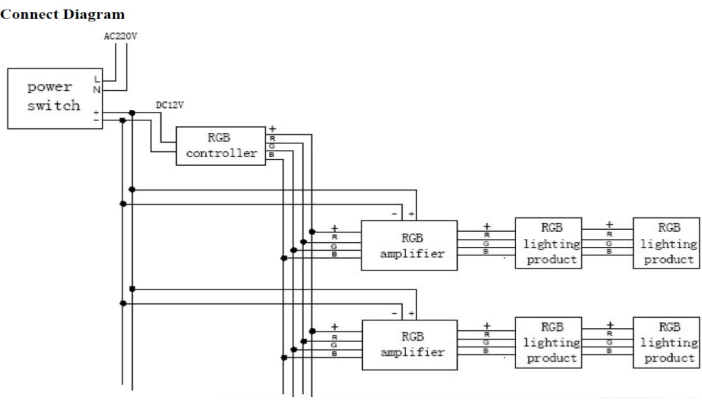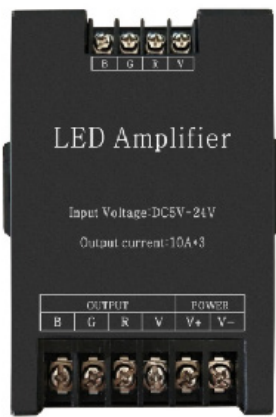

LED RGB Strip Light Amplifier

Model	12A-Amp
Description	12A Amplifier for RGB strip light
Input Voltage (VDC)	12-24
Output Voltage (VDC)	12-24
Output Power	<12A
L*W*H (mm)	111x75x26
Output Channel	3
Control Mode	-
Output Current Each Channel	<10A
Suitable Strip	RGB



LED RGB Strip
Wireless Controller DC5V-24V
(WX-CTL-RGB)



LED Double Colour Strip
Wireless Controller DC5V-24V
(WX-CTL-WD)



28Key LED RGB Strip
infrared-blue tooth controller DC5V-24V
(RFTC-03)



24Key LED RGB Strip
infrared-Wifi controller DC5V-24V
(IR28-BLE)



360W 5-24V LED single strip Amplifier
(AMF-T1)



2.4G LED RGB+W Strip light controller
(YS-T2.4-04)



Normal Dimmer Wall Switch

Model	Switch
Description	Normal Dimmable Wall Switch
Input Voltage (AC)	100-240
Output Voltage (AC)	100-240
Output Power	150-360W Max 1.5A
L*W*H (mm)	86x86x48
Frequency	RF 2.4GHz
Dimmable Level	0 -100%
Weight	0.234kg
IP Level	20



Three Control Modes




SMART Wifi controller for Strip Light

Model	SMART-CTL-RGB	SMART-CTL-SGL	SMART-CTL-RGBW	SMART-CTL-DOU
Input Voltage (VDC)	12	12	12	12
Output Voltage (VDC)	12	12	12	12
L*W*H (mm)	55x31x8.7mm	55x31x8.7mm	55x31x8.7mm	55x31x8.7mm
Control Mode	WIFI 2.4GHz	WIFI 2.4GHz	WIFI 2.4GHz	WIFI 2.4GHz
Output Cable	RGB 4pin 100mm	DC Plug D2.1 200mm	RGBW 5pin 100mm	3 color wire 100mm
Suitable Strip	RGB Strip	Single Colour Strip	RGB + Single Colour Strip	Double Colour Strip



amazon Alexa

Google Home

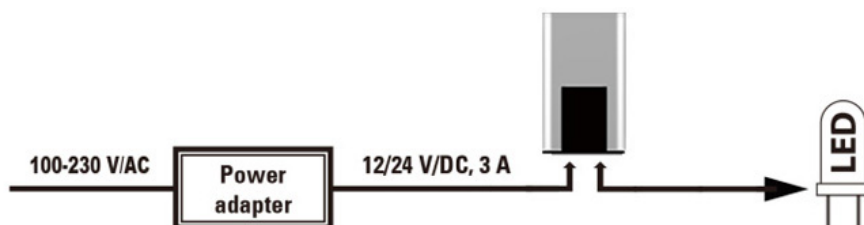



WX-SMART-SGL



WX-SMART-DOU



WX-SMART-RGB



WX-SMART-RGBW

amazon Alexa


Google Home




SMART Wifi controller for Strip Light

Model	WX-SMART-RGB	WX-SMART-SGL	WX-SMART-RGBW	WX-SMART-DOU
Input Voltage (VDC)	12-24	12-24	12-24	12-24
Output Voltage (VDC)	12-24	12-24	12-24	12-24
Receiver Size	90*38*25mm	90*38*25mm	90*38*25mm	90*38*25mm
Remote Controller Size	110*53*20mm	110*53*20mm	110*53*20mm	110*53*20mm
Control Mode	WIFI 2.4GHz	WIFI 2.4GHz	WIFI 2.4GHz	WIFI 2.4GHz
Output	RGB 4pin	2pin	RGBW 5pin	3 color 3pin
Suitable Strip	RGB Strip	Single Colour Strip	RGB + Single Colour Strip	Double Colour Strip


Strip Aluminum Profile (2 Meters/Pc)




Model: AP1506




Model: AP2507




Model: AP1715




Model: AP2515




Model: AP1616





Model: AP1511




Model: AP3535




Model: AP4935




Model: AP0710

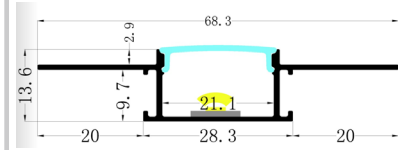


Model: AP6813




Model: AP2519



Model: APB015





Model: AP4917




Model: AP3626







Model: APB037




Model: APA001A



Model: APC013



Model: APB044



Model: AP4217

Mean Well Constant Voltage Power Supply



Model	LRS-35-12 / LRS-35-24	LRS-50-12 / LRS-50-24	LRS-75-12 / LRS-75-24
Input Voltage	85-264VAC	85-264VAC	85-264VAC
Output Voltage	12/24VDC	12/24VDC	12/24VDC
Current Output	0-3A	0-4.2A	0-6A
Frequency Range	47-63Hz	47-63Hz	47-63Hz
Rated Power	35W	50W	75W
Dimension	L99xW82xH30mm	L99xW82xH30mm	L99xW97xH30mm
Net Weight	230g	230g	300g
IP Rating	IP20	IP20	IP20

POWER SUPPLIES



Model	LRS-100-12 / LRS-100-24	LRS-150-12 / LRS-150-24
Input Voltage	85-264VAC	85-264VAC
Output Voltage	12/24VDC	12/24VDC
Current Output	0-8.5A	0-12.5A
Frequency Range	47-63Hz	47-63Hz
Rated Power	100W	150W
Dimension	L129xW97xH30mm	L159xW97xH30mm
Net Weight	340g	480g
IP Rating	IP20	IP20



Model	LRS-200-12 / LRS-200-24	LRS-350-12 / LRS-350-24
Input Voltage	85-264VAC	85-264VAC
Output Voltage	12/24VDC	12/24VDC
Current Output	0-17A	0-29A
Frequency Range	47-63Hz	47-63Hz
Rated Power	200W	350W
Dimension	L215xW115xH30mm	L215xW115xH30mm
Net Weight	660g	760g
IP Rating	IP20	IP20



Mean Well Constant Voltage Power Supply




Model	LPH-18-12	LPV-35-12 / LPV-35-24	LPV-60-12 / LPV-60-24
Input Voltage	85-264VAC	85-264VAC	85-264VAC
Output Voltage	12VDC	12/24VDC	12/24VDC
Current Output	0-1.5A	0-3A	0-5A
Frequency Range	47-63Hz	47-63Hz	47-63Hz
Rated Power	18W	35W	60W
Dimension	L140xW30xH22mm	L148xW40xH30mm	L162.5xW42.5xH32mm
Net Weight	175g	340g	400g
IP Rating	IP67	IP67	IP67



Model	LPV-100-12 / LPV-100-24	LPV-150-12 / LPV-150-24
Input Voltage	85-264VAC	85-264VAC
Output Voltage	12/24VDC	12/24VDC
Current Output	0-8.5A	0-10A
Frequency Range	47-63Hz	47-63Hz
Rated Power	100W	150W
Dimension	L190xW52xH37mm	L191xW63xH37.5mm
Net Weight	630g	740g
IP Rating	IP67	IP67

Ultra Thin Constant Voltage Power Supply

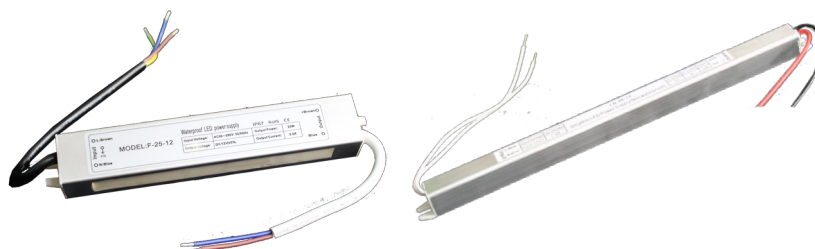

Model	F-25-12	LB-48-12
Input Voltage	90-260VAC	180-240VAC
Output Voltage	12VDC	12VDC
Current Output	0-2A	0-4A
Frequency Range	47-63Hz	47-63Hz
Rated Power	25W	48W
Dimension	L162xW29xH20mm	L268xW18xH18mm
IP Rating	IP67	IP67

Constant Voltage Power Supply



Model	PS-030-12 / PS-030-24	PS-060-12 / PS-060-24 / PS-060-12-D	PS-100-12 / PS-100-24 / PS-100-12-D
Input Voltage	175-264VAC	175-264VAC	175-264VAC
Output Voltage	12 / 24 VDC	12 / 24 VDC	12 / 24 VDC
Current Output	0-2.5A	0-5A	0-8.5A
Frequency Range	50-60Hz	50-60Hz	50-60Hz
Rated Power	30W	60W	100W
Dimension	L135xW35xH23mm	L170xW35xH23mm (D:L145xW48xH29mm)	L145xW48xH29mm (D:L160xW48xH29mm)
Net Weight	100g	130g	190g
IP Rating	IP20	IP20	IP20



Model	PS-150-12 / PS-150-24 / PS-150-12-D	PS-200-12 / PS-200-24
Input Voltage	175-264VAC	175-264VAC
Output Voltage	12 / 24 VDC	12 / 24 VDC
Current Output	0-12.5A	0-16.7A
Frequency Range	50-60Hz	50-60Hz
Rated Power	150W	200W
Dimension	L195xW48xH29mm (D:L180xW63xH29mm)	L195xW48xH29mm
Net Weight	270g	320g
IP Rating	IP20	IP20




Model	PS-300-12 / PS-300-24	PS-400-12 / PS-400-24
Input Voltage	175-264VAC	175-264VAC
Output Voltage	12 / 24 VDC	12 / 24 VDC
Current Output	0-25A	0-33.4A
Frequency Range	50-60Hz	50-60Hz
Rated Power	300W	400W
Dimension	L236xW49xH29mm	L236xW49xH29mm
Net Weight	385g	385g
IP Rating	IP20	IP20

Constant Voltage Power Supply (Automatic voltage switching between 12V and 24V)



Model	PS-036-12/24	PS-060-12/24	PS-100-12/24
Input Voltage	180-265VAC	180-265VAC	180-265VAC
Output Voltage	12 & 24 VDC	12 & 24 VDC	12 & 24 VDC
Current Output	0-3 / 0-1.5A	0-5 / 0-2.5A	0-8.33 / 0-4.2A
Frequency Range	50-60Hz	50-60Hz	50-60Hz
Rated Power	36W	60W	100W
Dimension	L145xW50xH29mm	L145xW50xH29mm (D:L145xW48xH29mm)	L158xW50xH29mm
Net Weight	102g	102g	248g
IP Rating	IP20	IP20	IP20



Model	PS-150-12/24	PS-200-12/24
Input Voltage	180-265VAC	180-265VAC
Output Voltage	12 & 24 VDC	12 & 24 VDC
Current Output	0-12.5 / 0-6.3A	0-16.6 / 0-8.3A
Frequency Range	50-60Hz	50-60Hz
Rated Power	150W	200W
Dimension	L176xW50xH29mm	L199xW50xH29mm
Net Weight	280g	302g
IP Rating	IP20	IP20



Model	PS-300-12/24	PS-400-12/24
Input Voltage	180-265VAC	180-265VAC
Output Voltage	12 & 24 VDC	12 & 24 VDC
Current Output	0-25 / 0-12.5A	0-33.3 / 0-16.7A
Frequency Range	50-60Hz	50-60Hz
Rated Power	300W	400W
Dimension	L218xW50xH29mm	L240xW50xH29mm
Net Weight	414g	515g
IP Rating	IP20	IP20


Constant Voltage Power Supply (Normal & 0-10V Dimming)



Model	PS-060-12-D	PS-100-12-D	PS-150-12-D
Input Voltage	100-265VAC	100-265VAC	100-265VAC
Output Voltage	12 VDC	12 VDC	12 VDC
Current Output	0-6.5A	0-8.33A	0-12.5A
Frequency Range	50-60Hz	50-60Hz	50-60Hz
Rated Power	60W	100W	150W
Dimension	L191xW49xH31mm	L232xW49xH31mm	L287xW49xH31mm
Net Weight	131g	176g	230g
IP Rating	IP20	IP20	IP20



Model	PS-060-24-D	PS-100-24-D	PS-150-24-D
Input Voltage	100-265VAC	100-265VAC	100-265VAC
Output Voltage	24 VDC	24 VDC	24 VDC
Current Output	0-3.33A	0-4.2A	0-6.25A
Frequency Range	50-60Hz	50-60Hz	50-60Hz
Rated Power	60W	100W	150W
Dimension	L191xW49xH31mm	L232xW49xH31mm	L287xW49xH31mm
Net Weight	131g	176g	230g
IP Rating	IP20	IP20	IP20

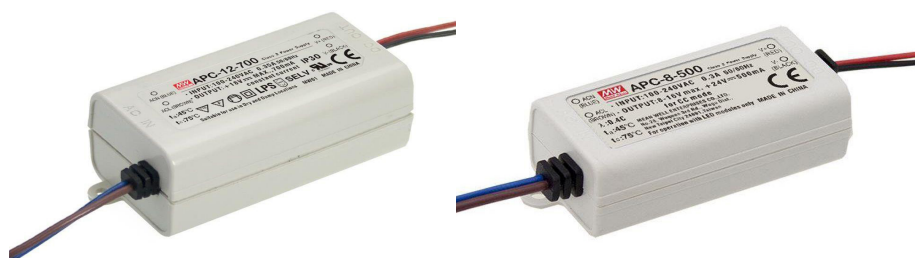

Model	APC-12-350	APC-8-350
Input Voltage	90 - 264VAC	90 - 264VAC
Output Voltage	9-36 VDC	23 VDC
Current Output	0-0.35A	0-0.35A
Frequency Range	50-60Hz	50-60Hz
Rated Power	12W	8W
Dimension	L77xW40xH29mm	L60xW30xH22mm
Net Weight	80g	40g
IP Rating	IP42	IP42




Model	APV-12-12	APV-16-12	APV-35-24
Input Voltage	90 - 264VAC	90 - 264VAC	90 - 264VAC
Output Voltage	12 VDC	12 VDC	24 VDC
Current Output	0-1A	0-1.25A	0-1.5A
Frequency Range	50-60Hz	50-60Hz	50-60Hz
Rated Power	12W	16W	35W
Dimension	L77xW40xH29mm	L77xW40xH29mm	L84xW57xH29.5mm
Net Weight	80g	100g	202g
IP Rating	IP42	IP42	IP42


SPOT LIGHTS



Plane [50%Ang.] [10%Ang.]
 C180.0: 36.5 88.2
 C30.0: 36.6 88.6
 C90.0: 36.2 88.6
 C150.0: 36.6 88.6



Polar Graph




GU10-01



Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
GU1007N01	7	500	>80	50	53.5	GU10	No	AL+PC
GU1007Y01	7	500	>80	50	53.5	GU10	Yes	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Cover	Working Temp (°C)
2700/3000/4000/6500	220-240	35	25000	SMD	20	0.7	Clear	-25--45



Plane [50%Ang.] [10%Ang.]
 C180.0: 36.5 88.2
 C30.0: 36.6 88.6
 C90.0: 36.2 88.6
 C150.0: 36.6 88.6




Polar Graph



MR16-01-240V

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
GU5307N01	7	500	>80	50	45	MR16	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Cover	Working Temp (°C)
3000	220-240	35	25000	SMD	20	0.7	Clear	-25--45



MR16-02

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
MR1605N01	5	420	>80	50	50	MR16	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Cover	Working Temp (°C)
2800/6500	12V AC/DC	35	25000	COB	20	-	Clear	-25--45



GU10-02 Tri Colour

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
GU1007N02-T	7	500	>80	50	53.5	GU10	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Cover	Working Temp (°C)
Tri Tone	220-240	35	25000	SMD	20	0.7	Clear	-25--45



AR111-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Voltage (V)
AR111Y1801	18	1800	>80	111	68	GU10	No	AC85-265V
Color Temp (K)	Material	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Cover	Working Temp (°C)
3000/6500	AL+PC	40	35000	COB	20	>0.9	Clear	-25--45





Par Light 20

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
P20Y1001	10	1000	>80	63	85	E27	No	AL+Glass
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/6500	85-265	15/24/36	35000	Built In	20	>0.9	Clear	-25--45




Par Light 30

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Material
P30Y3001	30	3000	>80	95	126	E27	No	AL+Glass
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000/4000/6500	85-265	15/24/36	35000	Built In	20	>0.9	Clear	-25--45

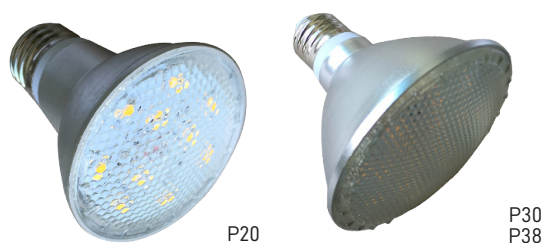

Waterproof Par Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Voltage (V)	Material
P30Y1202	12	1080	>80	95	87	E27	AC220-240V	AL+Glass
P30N1202	12	1080	>80	95	87	E27	AC/DC12V	AL+Glass
P38Y1502	15	1200	>80	122	130	E27	AC220-240V	AL+Glass
P38N1502	15	1200	>80	122	130	E27	AC/DC12V	AL+Glass
Color Temp (K)	Dimmable	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	No	120	35000	Built In	65	>0.9	Clear	-25--45



G4, G9

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Color Temp (K)
G4Y5W	5	500	>80	16	55	G4	No	3000
G9Y4W	4	400	>80	16	50	G9	No/Yes	3000
G9Y6T	6	600	>80	16	50	G9	No	Tri Tone
Material	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
AL+PC	220-240	360	35000	Built In	20	>0.9	Clear	-25--45



G4-12V

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Base	Dimmable	Color Temp (K)
G4Y3W-12V	3	300	>80	13	36	G4	No	3000

Material	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Glue	AC/DC12V	100	30000	Built In	20	>0.9	Clear	-25--45



COB Spot Light 01


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable		Material
COB1201-T	12	1200	>80	50	68	No		AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3CCT/Tri	220-240	35	35000	External	20	>0.9	Clear	-25--45

*3CCT = 3000k,4500k,6500k



Recessed Spot Light 01

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Cut Hole (mm)	Dimmable	Material
RSP201001	10	1000	>85	148	45	40	140*35	No	AL
RSP202001	20	2000	>85	282	45	40	274*35	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour		Chip	IP	PF	Working Temp (°C)
3000/4000	110-265	24	50000	Black / White		CREE	20	>0.65	-20--45



GU10 Surface Mounted Fitting-12

Model	Colour	Base Diameter (mm)	Height (mm)	Base	Number of Light	Material
FGU1012-R	White/Black	220	125	GU10	3	AL



FGU1006-S



FGU1006-2S



GU10 Surface Mounted Fitting-06

Model	Colour	L (mm)	W (mm)	Height (mm)	Base	Number of Light	Shape	Material
FGU1006-S	White/Black	100	100	90	GU10	1	Square	AL
FGU1006-2S	White/Black	200	100	90	GU10	2	Rectangle	AL



FGU1005-R



FGU1005-S



FGU1005-2




GU10 Surface Mounted Fitting-05

Model	Colour	L (mm)	W (mm)	Height (mm)	Base	Number of Light	Shape	Material
FGU1005-R	White/Black	80	80	125	GU10	1	Round	AL
FGU1005-S	White/Black	80	80	125	GU10	1	Square	AL
FGU1005-2	White/Black	150	80	125	GU10	2	Rectangle	AL



GU10 Surface Mounted Fitting-15

Model	Colour	L (mm)	W (mm)	Height (mm)	Base	Number of Light	Material
FGU1015-R	White/Black/Mix	178	90	105	GU10	2	AL



GU10 Surface Mounted Fitting-14

Model	Colour	L (mm)	W (mm)	Height (mm)	Base	Number of Light	Material
FGU1014-R	White/Black	176	93	124	GU10	2	AL



GU10 Surface Mounted Fitting-19

Model	Colour	D (mm)	Height (mm)	Base	Number of Light	Material
FGU1019	White	70	110	GU10	1	AL



GU10 Surface Mounted Fitting-11


Model	Colour	D (mm)	Height (mm)	Base	Number of Light	Material
FGU1011-R	White/Black	80	85	GU10	1	AL
FGU1011-R	Gold	95	125	GU10	1	AL



GU10 Surface Mounted Fitting-17

Model	Colour	D (mm)	Height (mm)	Base	Number of Light	Material
FGU1017	White/Black	70	100	GU10	1	AL


* Inner ring is grey.



GU10 Surface Mounted Fitting-18

Model	Colour	D (mm)	Height (mm)	Base	Number of Light	Material
FGU1018	Black	72	117	GU10	1	AL

* Inner ring is rose gold.

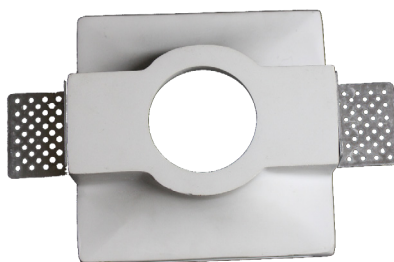

Gypsum GU10 Fitting

Model	Colour	L x W (mm)	Cut Hole (mm)	Base	Number of Light	Material
FGU1050-S	White	120x120	-	GU10	1	Gypsum
FGU1050-2	White	190X100	-	GU10	2	Gypsum

*Height with GU10 bulb is 90mm..



FGU1010-R



FGU1010-S



FGU1010-2R



FGU1010-2S




GU10 Fitting-10

Model	Colour	D (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1010-R	White/Black	105	95	GU10	1	Round	AL
FGU1010-S	White/Black	105x105	95x95	GU10	1	Round	AL
FGU1010-2S	White/Black	210x105	190x95	GU10	2	Round	AL
FGU1010-2R	White/Black	208x106	190x95	GU10	2	Round	AL



FGU1007-R

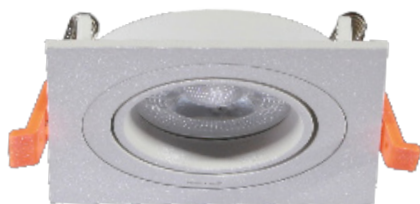

FGU1007-S




FGU1007-2R



FGU1007-2



FGU1007-3



GU10 Fitting-07


Model	Colour	L (mm)	W (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1007-R	White/Black	95	95	85	GU10	1	Round	AL
FGU1007-S	White/Black	92	92	85x85	GU10	1	Square	AL
FGU1007-2R	White/Black	175	95	158x80	GU10	2	Round	AL
FGU1007-2	White/Black	175	92	160x85	GU10	2	Rectangle	AL
FGU1007-3	White/Black	255	95	240x80	GU10	3	Rectangle	AL



FGU1003-S



FGU1003-2




GU10 Fitting-03

Model	Colour	L (mm)	W (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1003-S	White/Black	111	111	100x100	GU10	1	Square	AL
FGU1003-2	White/Black	205	111	192x100	GU10	2	Rectangle	AL




FGU1002-RB



FGU1002-RG



FGU1002-RS




GU10 Fitting-02

Model	Colour	D (mm)	Cut Hole (mm)	Base	Inner Rim	Shape	Material
FGU1002-RB	White/Black	113	95	GU10	Black	Round	AL
FGU1002-RS	White/Black	113	95	GU10	Silver	Round	AL
FGU1002-RG	White/Black	113	95	GU10	Rose Gold	Round	AL



GU10 Fitting-22

Model	Colour	D (mm)	Cut Hole (mm)	Base	Inner Rim	Shape	Material
FGU1022	White/Black	85	78	GU10	GB/SV/GD/RG	Round	AL



GU10 Fitting-04

Model	Colour	D (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1004-R2	White	90	80	GU10	1	Round	AL




FGU1001-R / FGU1020-R



FGU1001-S



FGU1001-2



GU10 Fitting-01

Model	Colour	L (mm)	W (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1020-R	White/Black	88	88	70	GU10	1	Round	AL
FGU1001-R	White/Black	105	105	85	GU10	1	Round	AL
FGU1001-S	White/Black	100	100	80x80	GU10	1	Square	AL
FGU1001-2	White/Black	182	100	160x80	GU10	2	Rectangle	AL




FGU1008-R




FGU1008-3



FGU1008-S

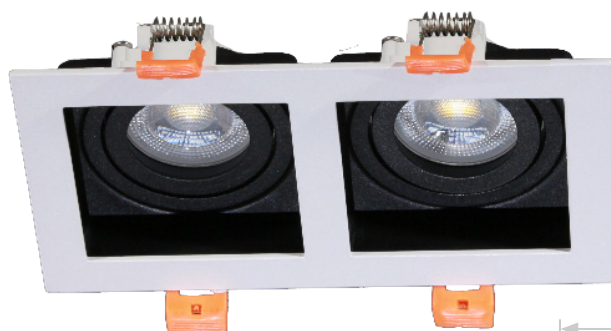

FGU1008-2



GU10 Fitting-08

Model	Colour	L (mm)	W (mm)	Cut Hole (mm)	Base	Number of Light	Shape	Material
FGU1008-R	White/Black	100	100	90	GU10	1	Round	AL
FGU1008-S	White/Black	100	100	90x90	GU10	1	Square	AL
FGU1008-2	White/Black	185	100	165x90	GU10	2	Rectangle	AL
FGU1008-3	White/Black	270	100	255x90	GU10	3	Rectangle	AL



Recessed Spot Light-25 - Adjustable Angle

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Cut Hole (mm)	Dimmable	Material
D2Y03R25	3	300	>85	65	35	55	No	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000/4000/6500	85-265	60	30000	White/Black	COB	20	>0.5	-20--45



1m, 1.5m, 2m tracks and
track connectors are available.

Track Size:
Width 35mm, Height 20mm

TRACK LIGHTS



Track Light 09

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)		H (mm)	Dimmable	Material
TL10N12	10	1000	>90	70		110	No	AL—
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000/4000	110-265	60	30000	Black / White	CREE	20	>0.65	-20--45




Track Light-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material
TL08N20	20	1700	>80	55	155	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Working Temp (°C)
3000/4000/6500	100-240	36	30000	COB	20	>0.9	-25--45



Track Light-08

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material
TL08N12	12	1083	>80	55	130	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Working Temp (°C)
3000/4000/6500	100-240	36	30000	COB	20	>0.9	-25--45




Track Light-08

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material
TL08N12	12	1200	>80	57	138	No	AL+PC
TL08N18	18	1800	>80	67	158	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	PF	Working Temp (°C)
3000/4000/6500	100-256	36	30000	COB	20	>0.5	-25--45




Track Light Casing-09

Model	Colour	D (mm)	L (mm)	Base	Material
TL-FTG	White/Black	55	100	GU10	AL
TL-FTG	Light Wood/Dark Wood	60	130	GU10	AL



Track Light Casing-11

Model	Colour	D (mm)	L (mm)	Base	Material
TL-FTG-11	White/Black	51	112	GU10	AL



Track Light Casing-12

Model	Colour	D (mm)	L (mm)	Base	Material
TL-FTG-12	White + Light Wood	55	110	GU10	AL
TL-FTG-12	Black + Dark Wood	55	110	GU10	AL




Linear Track Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
TL-LN-10W	10	800	>80	275	35	60	AL+PC
TL-LN-20W	20	1600	>80	540	35	60	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Dimmable	IP	PF	Working Temp (°C)
3000/4000	100-240	120	30000	No	20	>0.9	-25--45



Linear Spot Track Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
TL-SL-10W	10	800	>80	140	35	60	AL+PC
TL-SL-20W	20	1600	>80	270	35	60	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Dimmable	IP	PF	Working Temp (°C)
3000/4000	100-240	36	30000	No	20	>0.9	-25--45

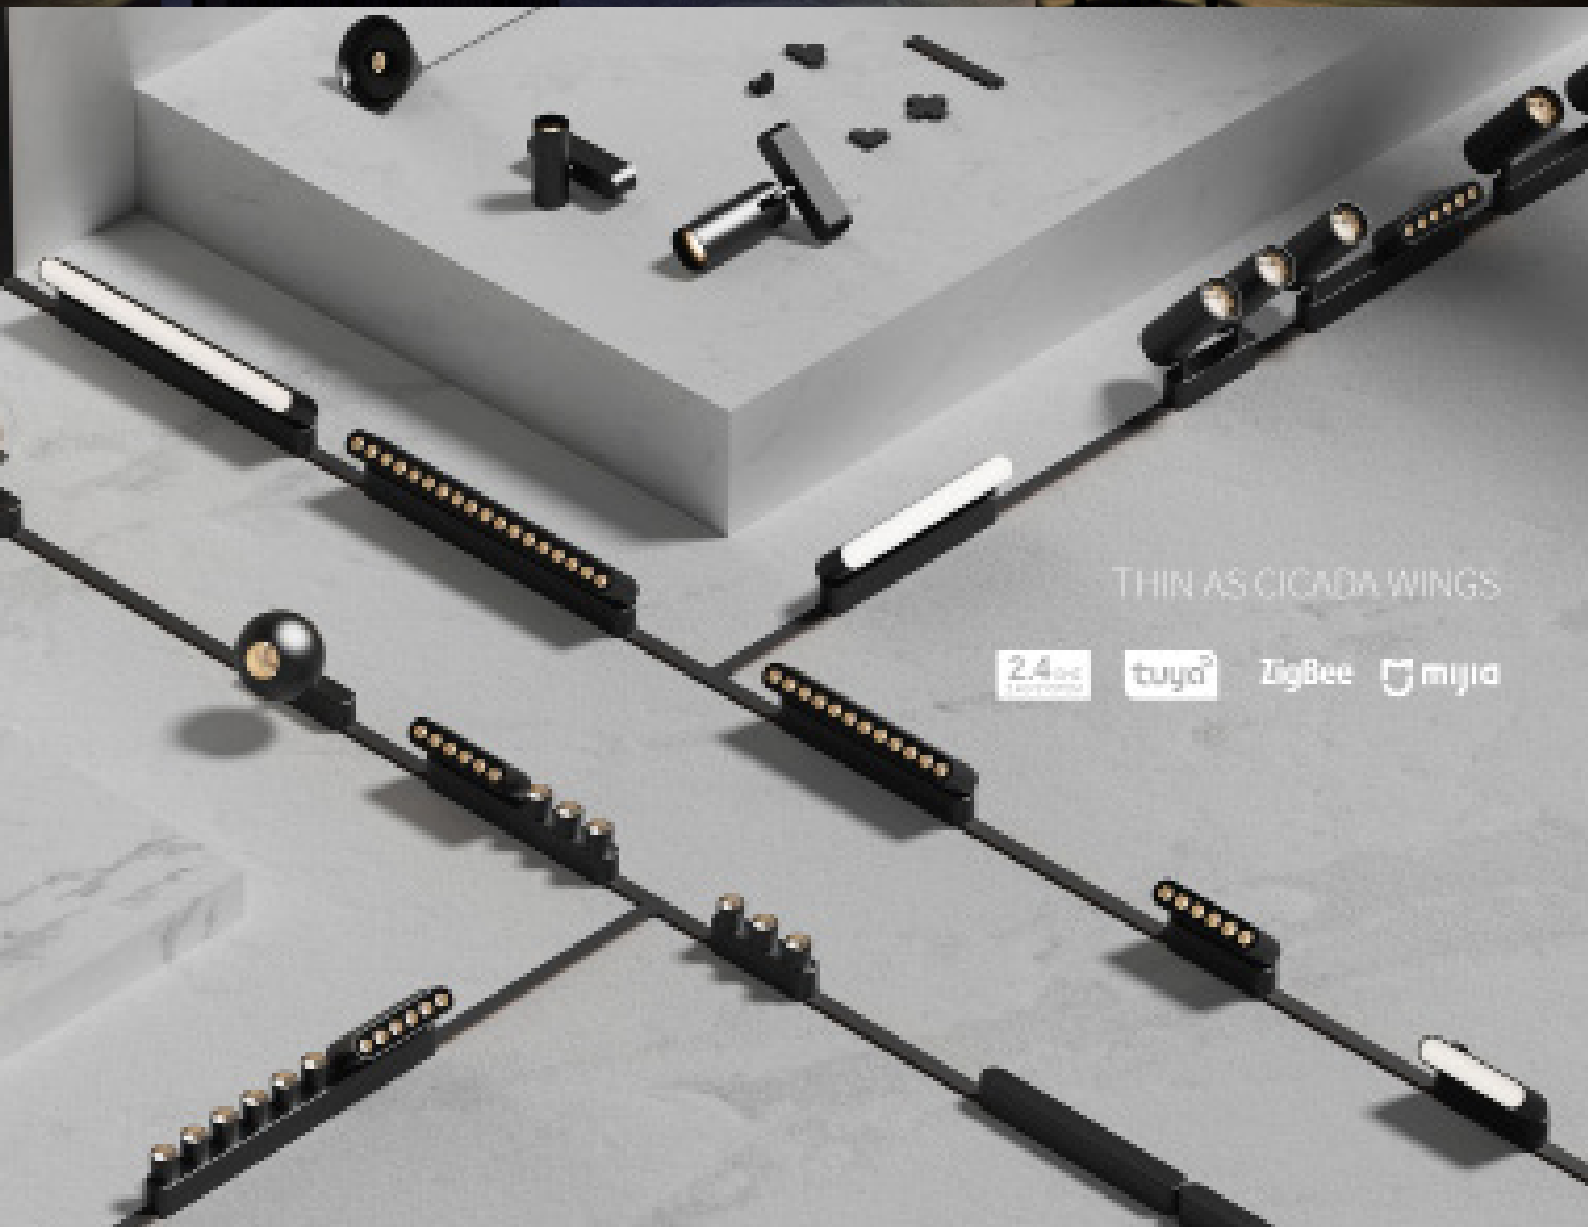


THIN AS CICADA WINGS

2.4G
1000000

tuya

ZigBee

mija

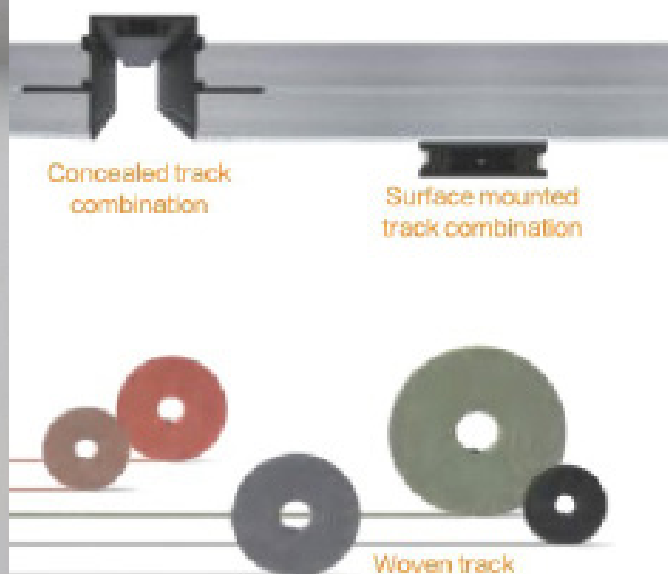

The lamp has two usage modes

Mode 1:

switchable for 3 CCT: White Light / Natural Light / Yellow Light

Mode



Mode 1
Mode 2

CCT



Yellow Light
Natural Light
White Light

Mode 2:

Smart control dimming and color adjustment: 2.4G / TUYA / ZigBee / MJia

Mode




Mode 1
Mode 2

System with selectable power supply

2.4G

tuya®

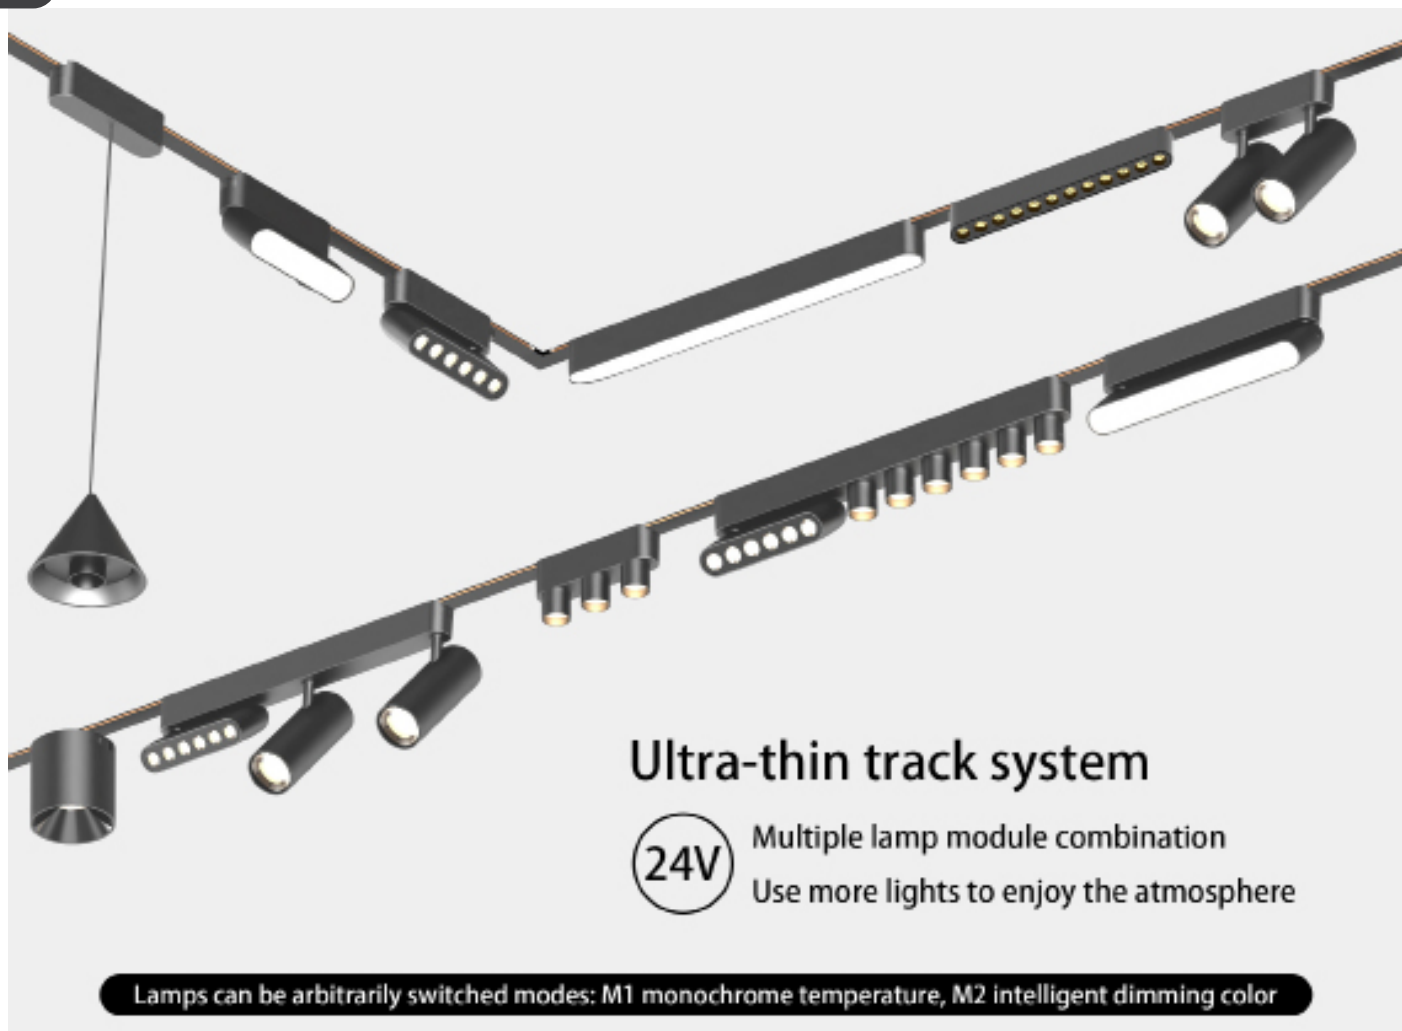

Magnetic Track Series



amazon Alexa

Google Home



Magnetic Track 16mm - Spot Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-TL12	12	1200	>90	43	110	AL
MT16-TL12-2	24	2400	>90	43	110	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Cylinder Spot Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-SSL6	6	600	>90	68	68	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Cylinder Ceiling Light



Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-SDL6	6	600	>90	68	68	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Cone Pendant Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-CONE90	6	600	>90	90	72	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home




Magnetic Track 16mm - Linear Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
MT16-LL12	12	1200	>90	222	25	29	AL
MT16-LL18	18	1800	>90	330	25	29	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	OSRAM SMD	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k

amazon Alexa


Google Home



Magnetic Track 16mm - Linear Spot Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
MT16-LSL12	12	1200	>90	222	25	29	AL
MT16-LSL18	18	1800	>90	330	25	29	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	OSRAM SMD	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k

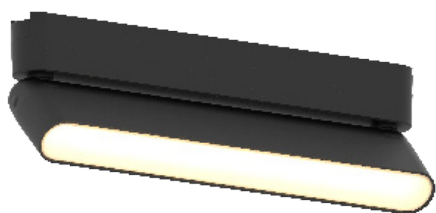

amazon Alexa

Google Home



Magnetic Track 16mm - Adjustable Linear Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
MT16-LL12-A	12	1200	>90	222	25	78	AL
MT16-LL18-A	18	1800	>90	330	25	78	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	OSRAM SMD	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Adjustable Linear Spot Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
MT16-LSL12-A	12	1200	>90	222	25	78	AL
MT16-LSL18-A	18	1800	>90	330	25	78	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Chip	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	OSRAM SMD	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Double Glass Ball Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-BALL80	6	600	>90	80	115	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Glass Ball Light Light


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-BALL150	6	600	>90	150	170	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Wall Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-Wall	9	900	>90	168	48	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Pendant Light 1


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-PD1-330	18	1800	>90	330	110	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Pendant Light 2


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-PD2-300	18	1800	>90	300	165	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Ball Pendant Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-PD3-95	6	600	>90	95	95	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black	-25--45

*3CCT = 3000k,4500k,6500k



amazon Alexa

Google Home



Magnetic Track 16mm - Silicone Light

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	L (mm)	Material
MT16-SILICONE14	14	1400	>90	22	1000	Silicone
MT16-SILICONE28	28	2800	>90	22	2000	Silicone
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
3CCT/Tri	24VDC	120	30000	20	Black / White	-25--45

*3CCT = 3000k,4500k,6500k



Magnetic Track 16mm - Bluetooth Speaker

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Material
MT16-Speaker	-	-	-	64	89	AL
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	IP	Color	Working Temp (°C)
-	24VDC	-	30000	20	Black	-25--45



MT16-PSJK

MT16-PDSR

MT16-PDDK

MT16-PDYT


MT16-PDGK

Magnetic 16mm - Flexible Wire

Model	Power (W)	Lumens (lm)	CRI (Ra)	W (mm)	H (mm)	Material
MT16-Flexible-10M	6	600	>90	90	72	AL

Connection options








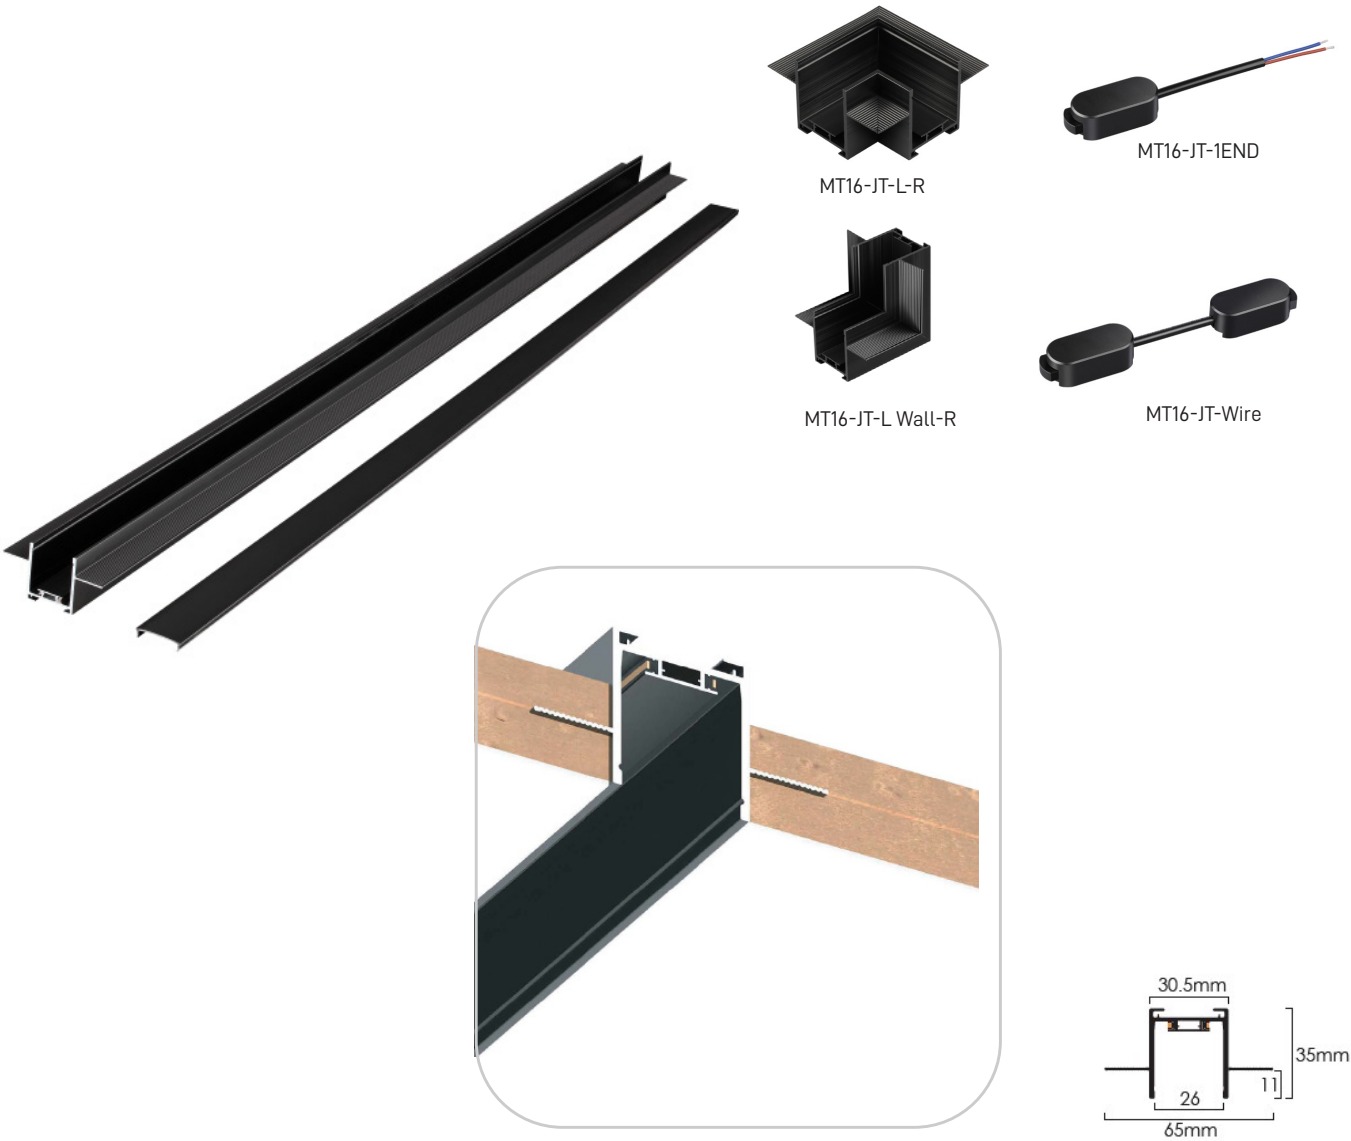

Magnetic Track 16mm - Recessed

Model	Voltage (V)	Length (mm)	W (mm)	H (mm)	Color	IP	Material
MT16-RT-1M	24VDC	1000	65	35	Black / White	20	AL
MT16-RT-1.5M	24VDC	1500	65	35	Black / White	20	AL
MT16-RT-2M	24VDC	2000	65	35	Black / White	20	AL




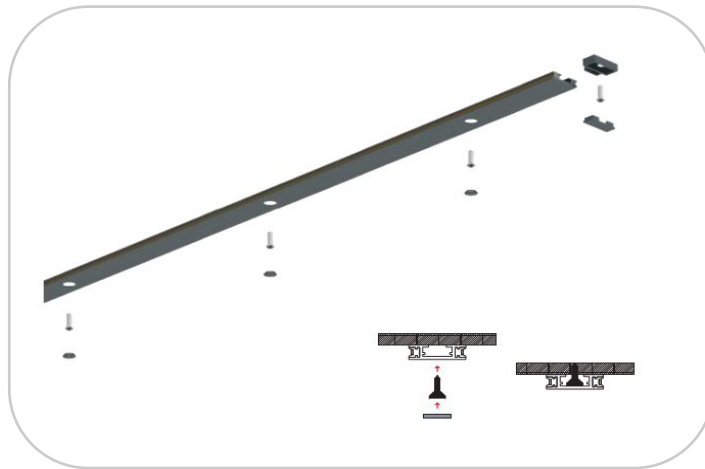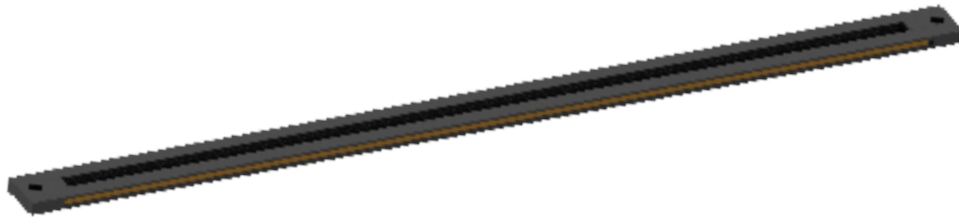

Magnetic Track 16mm - Surface

Model	Voltage (V)	Length (mm)	W (mm)	H (mm)	Color	IP	Material
MT16-ST-1M	24VDC	1000	16.5	4.5	Black / White	20	AL
MT16-ST-1.5M	24VDC	1500	16.5	4.5	Black / White	20	AL
MT16-ST-2M	24VDC	2000	16.5	4.5	Black / White	20	AL





MT16-CABLE BOX

Magnetic Track (16mm) Cable Box
Size: 100x25x29mm



MT16-DR100

Magnetic Track 100w Driver 24V
Size: 222x25x29mm



MT16-DR200

Magnetic Track 200w Driver 24V
Size: 330x25x29mm



MT16-DR100-2.4G

Magnetic Track (16mm) 2.4G 100w Driver 24V
Size: 330x25x29mm



MT16-RCL2.4G

Magnetic Track (16mm) 2.4G Remote
Controller
Size: 141x42x12mm



MT16-SCL2.4G






Magnetic Track (16mm) 2.4G Touch Screen
Remote Controller
Size: 88x86x9.3mm



MT16-GATEWAY2.4G

Magnetic Track (16mm) 2.4G Gateway
Size: 88x86x9.3mm

LINEAR LIGHTS

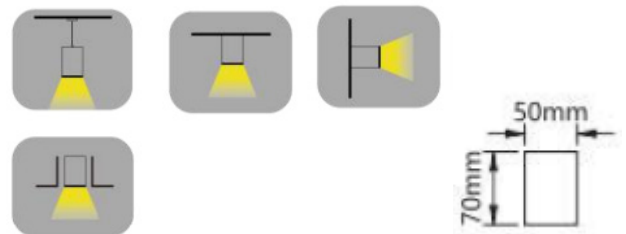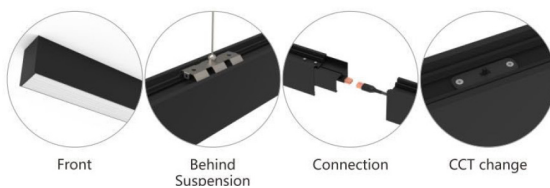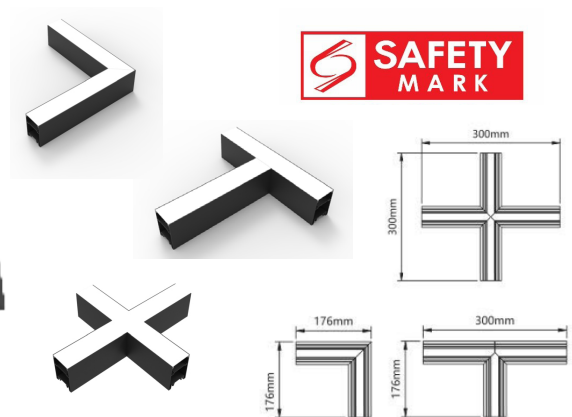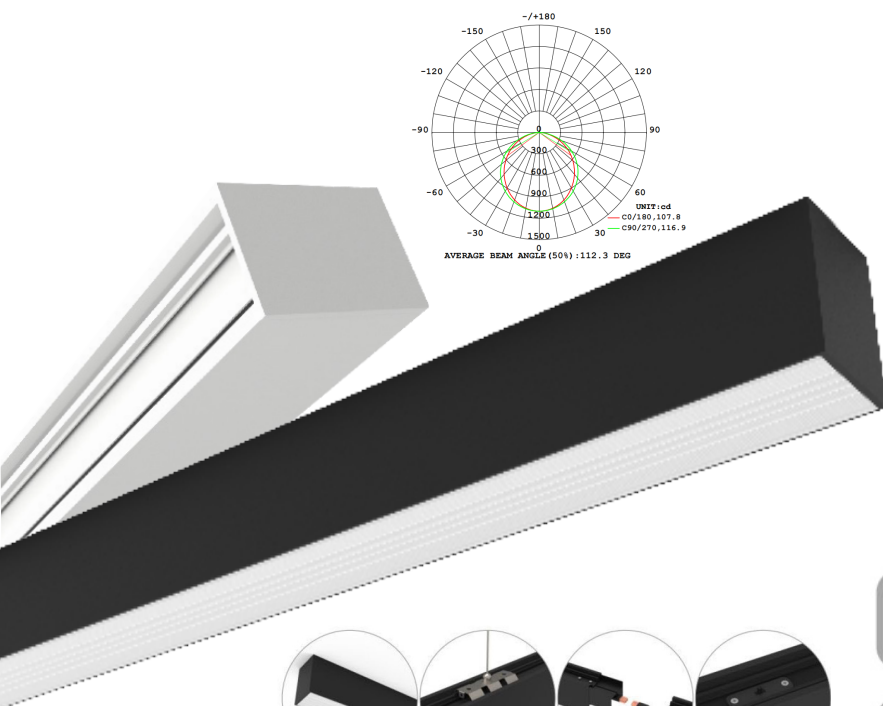

LL5070

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
LL507012Y35	36	4860	>80	1200	50	70	AL+PC
Color Temp (K)	Lifespan (hrs)	Voltage (VAC)	Beam Angle(°)	Driver	IP	PF	LED
3CCT	50000	180-265	120	Built In	40	0.9	SMD



* Black and white casing are available.



Wall Light-33

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
WL18H33	18	1440	>80	260	120	120	-	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	100-277	120	30000	Built In	65	0.9	Clear	-15--50

WALL LIGHTS/STEP LIGHTS



Wall Light-25



Model	Base	D (mm)	H (mm)	IP	Colour	Material
WL-FTG-25-1	1 x E27	90	160	65	Black	AL
WL-FTG-25-2	2 x E27	90	260	65	Black	AL



WL-FTG-02-1




WL-FTG-02-2



Wall Light Fitting-02

Model	Colour	L (mm)	W (mm)	H (mm)	Base	Material
WL-FTG-02-1	Black	104	100	160	GU10	AL+Acrylic
WL-FTG-02-2	Black	104	100	235	GU10	AL+Acrylic

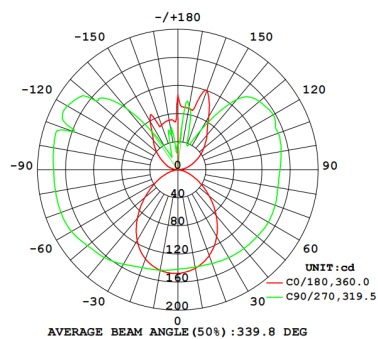

Wall Light Fitting-03

Model	Colour	L (mm)	W (mm)	H (mm)	Base	Material
WL-FTG-03-2	Black	160	90	305	E27	AL+Acrylic



WL15R30



WL15S30



WL15R30-FRAME



WL15S30-FRAME



Wall Light-30




Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
WL15R30	15	1400	>80	170	170	100	-	PC
WL15S30	15	1400	>80	160	160	100	-	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Tri Colour	100-277	120	30000	Built In	65	0.9	Clear	-15--50



WL12R21





WL12S21



Wall Light-21

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
WL12R21	12	1200	>80	160	160	100	-	AL+PC
WL12S21	12	1200	>80	160	160	100	-	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	100-277	120	30000	Built In	65	0.9	Clear	-15--50

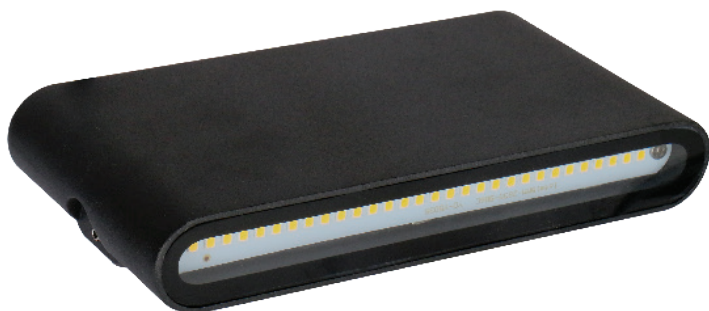

Wall Light-20




Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
WL12S20	2x6W	960	>80	175	90	35	-	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Colour	Working Temp (°C)
3000	85-270	120	30000	Built In	65	0.9	Black/White	-20--50



WL2X3R06




WL2X3S06



Wall Light-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Colour	Material
WL2X3R06	2x3W	600	>80	90	65	160	Black	AL+Glass
WL2X3S06	2x3W	600	>80	90	65	160	Black	AL+Glass
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	100-277	120	30000	Built In	65	0.9	Clear	-15--50



Wall Light Fitting-01

Model	Colour	W (mm)	D (mm)	H (mm)	Base	Material
WL-FTG-01	Black/Grey	70	85	80	GU10	AL+Glass
WL-FTG-01-2	Black/Grey	70	85	150	GU10	AL+Glass



WL2X3Y01



WL2X4Y01



Wall Light-08

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	H (mm)	Colour	Material
WL2X3Y01	3x2W	600	>80	170	40	80	White	AL
WL2X4Y01	4x2W	800	>80	200	50	90	White	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	85-265	120	30000	Built In	54	0.9	Clear	-30--50




WL05R04



WL10R04



WL15R04



Wall Light-04

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Colour	Material
WL05R04	5	500	>80	150	100	60	White	AL
WL10R04	10	1000	>80	250	100	60	White	AL
WL15R04	15	1500	>80	350	100	60	White	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	240	120/120	30000	Built In	54	0.9	Clear	-30--50




WL05R03



WL10R03



WL15R03



Wall Light-03

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Colour	Material
WL05R03	5	500	>80	150	100	60	White	AL
WL10R03	10	1000	>80	250	100	60	White	AL
WL15R03	15	1500	>80	350	100	60	White	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	240	90	30000	Built In	54	0.9	Clear	-30--50



Indoor Wall Light-10

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material	
RWL10	8	640	>85	190	50	No	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Socket	IP	PF	Working Temp (°C)
3000	110-265	120	30000	Bronze	G9	20	>0.65	-20--45



Indoor Wall Light-11

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material	
RWL11-1	10	560	>85	200	50	No	AL+PC	
RWL11-2	15	1200	>85	300	50	No	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000	110-265	120	30000	White	2835	20	>0.65	-20--45



Indoor Wall Light-07

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Shape	Material
RWL07R	9+3	840	>85	146	80	146	Round	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000	110-265	120	30000	Black/White	2835	20	>0.65	-20--45



Indoor Wall Light-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material	
RWL08	7	560	>85	145	70	No	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000	110-265	120	30000	Black/White	2835	20	>0.65	-20--45




Indoor Wall Light-02

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
RWL02	8	560	>85	100	50	270	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Black/Silver/Gold	2835	20	>0.65	-20--45



Indoor Wall Light-05

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	H (mm)		Dimmable	Material
RWL05	4W G9 Bulb	-	>85	260	105		No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Socket	IP	PF	Working Temp (°C)
-	110-265	120	30000	Bronze	G9	20	>0.65	-20--45



Indoor Wall Light-12

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	H (mm)	Dimmable	Material
RWL12	10	100	>80	200	100	45	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3CCT/Tri	110-265	120	30000	Black/White	2835	20	>0.65	-20--45




Indoor Wall Light-09

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Dimmable	Material
RWL09-1	10	700	>85	130	150	130	No	AL+PC
RWL09-2	20	1400	>85	260	150	130	No	AL+PC
RWL09-3	30	2100	>85	390	150	130	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000	110-265	120	30000	Black/White	2835	20	>0.65	-20--45





Indoor Wall Light-06

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	D (mm)	H (mm)	Shape	Material
RWL06R	6	480	>85	210	130	270	Round	Copper
RWL06S	6	480	>85	220	180	260	Square	Copper
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	85-265	120	30000	Gold	2835	20	>0.65	-20--45




Wall Light-22

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Colour	Material
WL2X5R22	2x5W	1000	>80	100	85	200	Black	AL+Glass
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	85-265	90	0000	Built In	54	0.9	Clear	-15--50



Step Light-03

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Cut Hole (mm)	Material
STE02Y03	2	200	>80	84	84	45	75x75xH45	AL
STE05Y03	5	500	>80	60	210	48	196x55xH48	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	85-265	120	30000	Built In	65	0.9	Clear	-15--50



Wall Light With Sensor

Model	Power (W)	Lumens (lm)	CRI (Ra)	A (mm)	B (mm)	C (mm)	D (mm)	Colour	Material
SOSL5026-TS	26	2730	>80	271	126.5	111.5	70	Black	PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Sensor Distance	Cover	Working Temp (°C)
3CCT	120-277	120-270	50000	Built In	65	0.9	10m	Frosted	-20--45

* On/Off Sensor is Available

Features



- PIR sensor design with lighting control and 15% standby function.
- Adjustable sensitivity and hold time.
- Adjustable lighting direction: 350° in horizontal direction and 180° in vertical direction.
- Wet location for outdoor application.
- Easy to disassemble and install, convenient for maintenance.





Indoor Wall Linear Light-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Edge	Material
WLL01-08	20	1600	>85	800	60	35	Round/Square	AL+PC
WLL01-12	30	2400	>85	1200	60	35	Round/Square	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
Tri Tone	110-265	120	30000	Black	2835	20	>0.65	-20--45

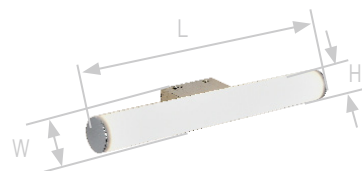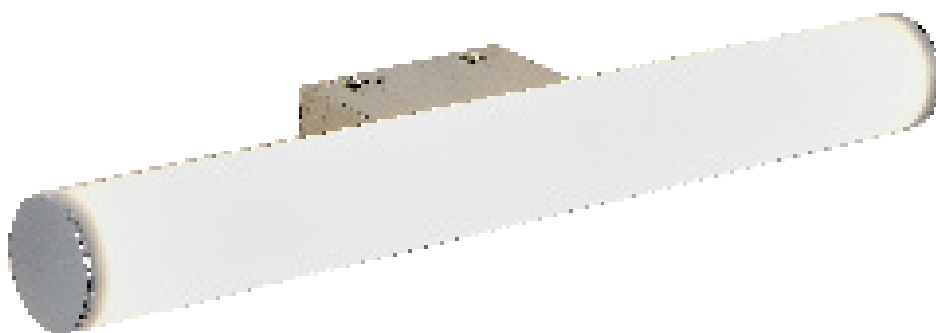

Mirror Light-05

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Material
ML01Y05	8	520	>80	550	100	50	ST+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	Colour	Working Temp (°C)
3CCT	100-277	120	30000	Built In	44	Silver	-15--50


*3CCT = 3000k,4500k,6500k



Mirror Light-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	Base (mm)	Material
ML08Y01	8	640	>80	495	140	130x60	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	Colour	Working Temp (°C)
3CCT	100-277	120	30000	Built In	44	Bronze/Black/White	-15--50


*3CCT = 3000k,4500k,6500k

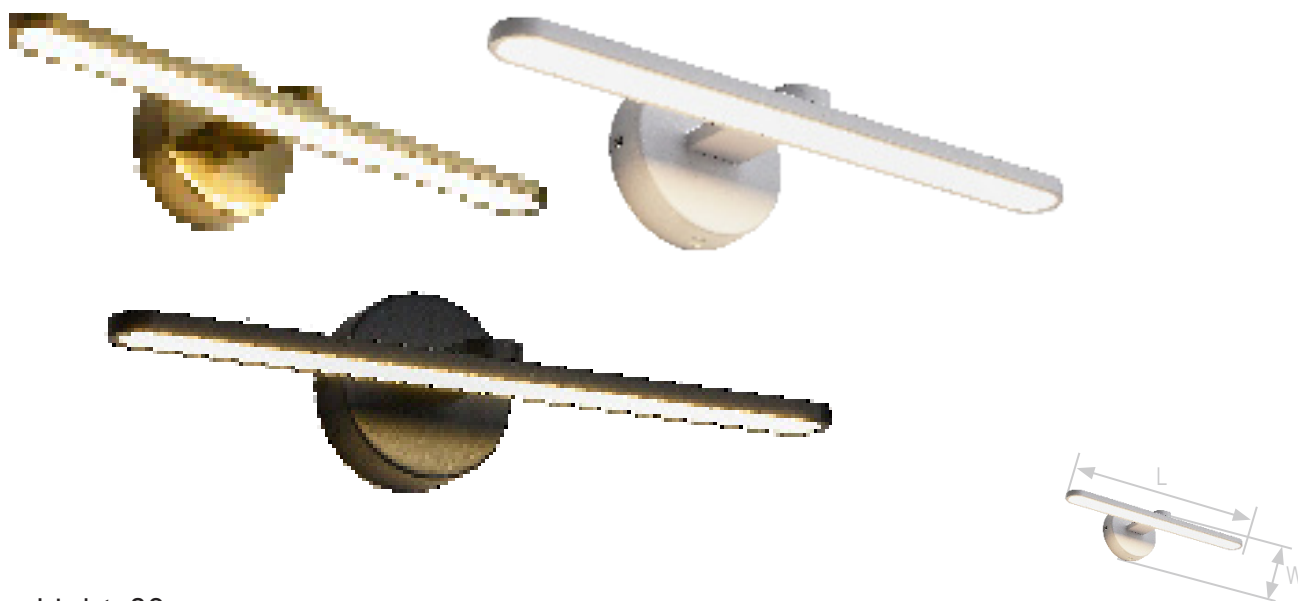

Mirror Light-02

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	W (mm)	Base (mm)	Material
ML14Y02	14	1120	>80	500	70	110	AL+PC
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	Colour	Working Temp (°C)
3CCT	100-277	120	30000	Built In	44	Bronze/Black/White	-15--50

*3CCT = 3000k,4500k,6500k



Lawn Lamp Fitting

Model	Colour	W (mm)	D (mm)	H (mm)	Base	Material
LALF01	Black	80	80	350	GU10	AL+Glass


PROJECTION LIGHTS



LAL10Y04A



LAL07Y04B




Lawn Lamp-04

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Colour	Dimmable	Material
LAL07Y04B	7	700	>80	75	190	Black	No	AL+Glass
LAL10Y04A	10	1000	>80	100	200	Black	No	AL+Glass
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
3000	85-265	60	35000	Built In	65	0.9	Clear	-15--50

BOLLARD LIGHTS



Bollards-31





Model	Power (W)	Lumens (lm)	CRI (Ra)	D1 (mm)	D2 (mm)	H (mm)	Colour	Dimmable	Material
BOLE27Y31	LED Bulb 4-18W	-	>80	200	130	800	Black	No	AL+PMMA
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver		IP	PF	Lamp Base	Working Temp (°C)
-	85-265	360	35000	Built In		65	0.5	E27	-15--50



BOLE27R11




BOLE27F11

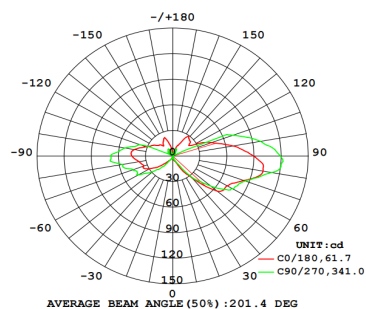

Bollards-11

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Colour	Dimmable	Material
BOLE27R11	LED Bulb 4-18W	-	>80	145	800	Black	No	AL+PMMA
BOLE27F11	LED Bulb 4-18W	-	>80	145	800	Black	No	AL+PMMA
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Lamp Base	Working Temp (°C)
-	240	360	-	Built In	65	0.5	E27	-20--60

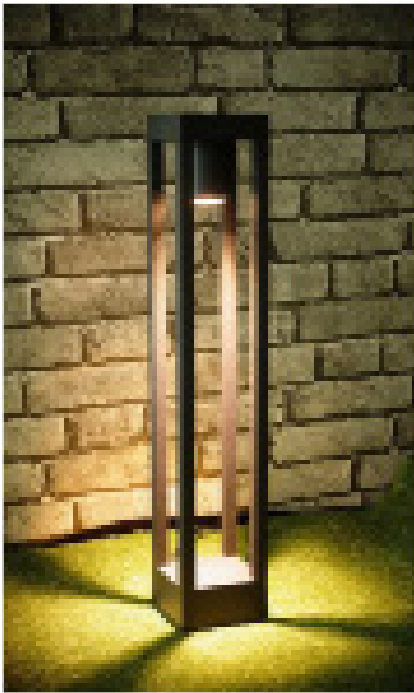

Bollards-49

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	L (mm)	H (mm)	Colour	Material
BOLE27S49-600	LED Bulb 4-18W	-	>80	106	106	600	Black	AL
BOLE27S49-800	LED Bulb 4-18W	-	>80	106	106	800	Black	AL
BOLE27S49-1000	LED Bulb 4-18W	-	>80	106	106	1000	Black	AL
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Lamp Base	Working Temp (°C)
-	240	120	35000	Built In	65	0.5	E27	-15--50

UNDER WATER LIGHTS




Under Water Fitting


Model	Colour	W (mm)	D (mm)	H (mm)	Base	Material
UWL-FTG	Silver	75	92	105	MR16	ST+TG



Under Water-04



Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Material	
UW1X1N04A	1	100	>80	42	75	No	ST+TG	
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Control Mode	Working Temp (°C)
3000	AC/DC24	8/25/45/60	30000	Built In	68	>0.9	-	-35--50



PAR56 Underwater


Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Base	Material
P56N2401	24	2400	>80	178	108	No	G53	AL+Glass
Color Temp (K)	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Working Temp (°C)	
3000	12V AC/DC	180	50000	External	68	>0.9	-35--50	



SOLAR LIGHTS




Solar Bollard Light-05




Model	Battery	Power (W)	CRI (Ra)	D (mm)	H (mm)	Light	Material
SOBOL04S05	Li-ion battery:3.2V 7Ah	3	>70	(refer to above picture)		30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour	IP	Charging Time	Working Time
3000	Polysilicon 5V 4.5W	360	400	Black	65	6-8 Hours	8-12 Hours



Solar Bollard Light-12




Model	Battery	Power (W)	CRI (Ra)	D (mm)	H (mm)	Light	Material
SOBOL12	Li-ion battery:3.2V 7Ah	3	>70	(refer to above picture)		30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour	IP	Charging Time	Working Time
3000	Polysilicon 5V 4.5W	360	400	Black	65	6-8 Hours	8-12 Hours




Solar Gate Top Light-03

Model	Battery	Power (W)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Light	Material
SOGL03N03	Li-ion battery:3.7V 7 Ah	3	>70	(refer to above picture)			30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour		IP	Charging Time	Working Time
3000	Polysilicon 5v 3w	360	400	Black		65	6-8 Hours	> 10 Hours




Solar Gate Top Light-01

Model	Battery	Power (W)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Light	Material
SOGL03N01	Li-ion battery:3.7V 7 Ah	3	>70	(refer to above picture)			30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour	IP	Charging Time	Working Time	
3000	Polysilicon 5v 3w	360	400	Black	65	6-8 Hours	> 10 Hours	



Solar Wall Light-07

Model	Battery	Power (W)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Light	Material
SOWL03N07	Li-ion battery:3.7V 7 Ah	3	>70	(refer to above picture)			30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour	IP	Charging Time	Working Time	
3000	Polysilicon 5v 3w	360	400	Black	65	6-8 Hours	> 10 Hours	



Solar Wall Light-04

Model	Battery	Power (W)	CRI (Ra)	L (mm)	W (mm)	H (mm)	Light	Material
SOWL03N04	Li-ion battery:3.7V 7 Ah	3	>70	(refer to above picture)			30pcs LED	AL+PC
Color Temp (K)	Solar Panel	Beam Angle(°)	Lumen (lm)	Colour		IP	Charging Time	Working Time
3000	Polysilicon 5v 3w	360	400	Black		65	6-8 Hours	> 10 Hours



Solar Flood Light-08

Model	Battery	Power (W)	Lumen (lm)	L (mm)	W (mm)	H (mm)	Solar Panel	Charging Time
SOFL100N08	3.2V 15AH	100	-	270	237	45	6V 20W Poly	5-6 Hours
SOFL200N08	3.2V 20AH	200	-	318	288	50	6V 25W Poly	5-6 Hours
Color Temp (K)	Light	Beam Angle(°)	CRI (Ra)	Colour		IP	Material	Working Time
6500	SMD5730	120	>70	Black		65	AL+Glass	> 12 Hours

* Continuously cloudy and rainy days: Working 2-3days



Solar Spike Light-01

Model	Battery	Power (W)	Lumen (lm)	D (mm)	H (mm)	Charging Time
SOSL07N01	3.7V 20AH	7	-	90	300	5-6 Hours
Color Temp (K)	Material	Beam Angle(°)	CRI (Ra)	Colour	IP	Working Time
3000	PC	60	>70	Black	65	> 12 Hours

* Continuously cloudy and rainy days: Working 2-3days



Pendant Light with Bluetooth Speaker Series 1

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Color Temp (K)	Material
YYCL32Y03	32	2500	>80	360	160	Yes	Multiple Colour	PC
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Round	85-260	360	30000	Built In	20	0.9	Frosted	-20--50

PENDANT LIGHTS



Pendant Light with Bluetooth Speaker Series 2

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	H (mm)	Dimmable	Color Temp (K)	Material
YYCL32Y04	32	2500	>80	300	360	Yes	Multiple Colour	PC
Shape	Voltage (VAC)	Beam Angle(°)	Lifespan (hrs)	Driver	IP	PF	Cover	Working Temp (°C)
Round	85-260	360	30000	Built In	20	0.9	Frosted	-20--50



BLHL-22-1

BLHL-21-1

BLHL-23-1

BLHL-20-1

BLHL-24-1

Gold Pendant Light-01

Model	Colour	W (mm)	H (mm)	Base	Material
BLHL-22-1	Gold	200	460	E27	Metal
BLHL-21-1	Gold	150	350	E27	Metal
BLHL-23-1	Gold	310	310	E27	Metal
BLHL-20-1	Gold	200	400	E27	Metal
BLHL-24-1	Gold	210	400	E27	Metal



BLHL-50-6
W1200 x H300mm
E27
Gold/Black



BLHL-72-3
W140 x H230mm
E27

****Single header is available!**



BLHL-91-3
W195 x H275mm
GU10

****Single header is available!**



BLHL-59-5
W900 x H300mm
G9 + Tri colour
(Gold /Back Fitting)



BLHL-114-1C
W135 x H240mm
E27



BLHL-114-1D
W200 x H180mm
E27



BLHL-159-3
W240 x H170mm
E27



BLHL-161-3
W150 x H350mm
E27

BLHL-163-3
Ball Diameter 150mm
G9



BLHL-162-1
W380 x H210mm
E27





BLHL-164-1
W380 x H300mm
E27



BLHL-204
A: W300 x H300mm
B: W400 x H400mm
C: W500 x H500mm
D: W600 x H600mm
D: W800 x H800mm
E27

**all are in single header



BLHL-46-1

(from left to right)

A: W260 x H270mm

B: W160 x H250mm

C: W160 x H250mm

D: W260 x H270mm

E27

**all are in single header
Three header is available



BLHL-67-3

W600 x H150mm

E27

BLHL-73-1
W190 x H160mm (Black)
W155 x H205mm (Rose Gold)
9W Tri colour

****all are in single header**



BLHL-74-5
W1150 x H180mm
30W Tri colour





BLHL-168-1
W125 x H170mm
E27



BLHL-56-4
(from left to right)
A: W180 x H190mm
B: W200 x H240mm
C: W140 x H200mm
D: W300 x H220mm
E27

****Single & Three header is available!**

BLHL-89

A: W200 x H180mm

B: W260 x H220mm

C: W310 x H260mm

D: W420 x H350mm

E27

**all are in single header



BLHL-43-1
W210 x H210mm
5w Warm White





BLHL-97-3
W130 x H150mm
G4

****Single header is available!**



BLHL-132-3
W250x H250mm
E27

****Single header is available!**

BLHL-57-3
W200 x H230mm
E27

**Single header is available!



BLHL-100-3
(from left to right)
A: W300 x H280mm
B: W200 x H300mm
C: W130 x H320mm
E27

**Single header is available!





(from left to right)

BLHL-35-1

W240 x H270mm

BLHL-34-1

W100 x H380mm

BLHL-33-1

W200 x H260mm

9W Tri Colour

****all are in single header**



BLHL-119-3

(from left to right)

A: W190 x H240mm

B: W150 x H220mm

C: W110 x H310mm

E27

****Single header is available!**

BLHL-68-1
 (from left to right)
 A: W320 x H200mm
 B: W250 x H450mm
 C: W350 x H450mm
 D: W350 x H350mm
 E27

**all are in single header



BLHL-66-6
 W740 x H380mm
 E27 x 6pcs





BLHL-113-1
 Diameter 200+400+600mm
 40W Tri Colour
 (Black, white and gold)



(from left to right)
 BLHL-79-1
 W360 x H190mm

BLHL-77-1
 W185 x H390mm

BLHL-80-1
 W240 x H320mm

E27

BLHL-104-1
 W1200 x H120mm
 30W Tri Colour
 Dimmable with Remote



BLHL-31-1
 W1200 x H150mm
 30W Tri Colour
 Dimmable with Remote





BLHL-124-8
W400 x H400mm
G9 x 8pcs

BLHL-125-9
W500 x H500mm
G9 x 9pcs



BLHL-69-5
W1500 x H270mm
40W Tri Colour
Dimmable with Remote

BLHL-30-1
W220 x H250mm
4w Tri Colour




BLHL-27-1
W170 x H170mm
4w Tri Colour





BLHL-123-4
W650 x H215mm
E27

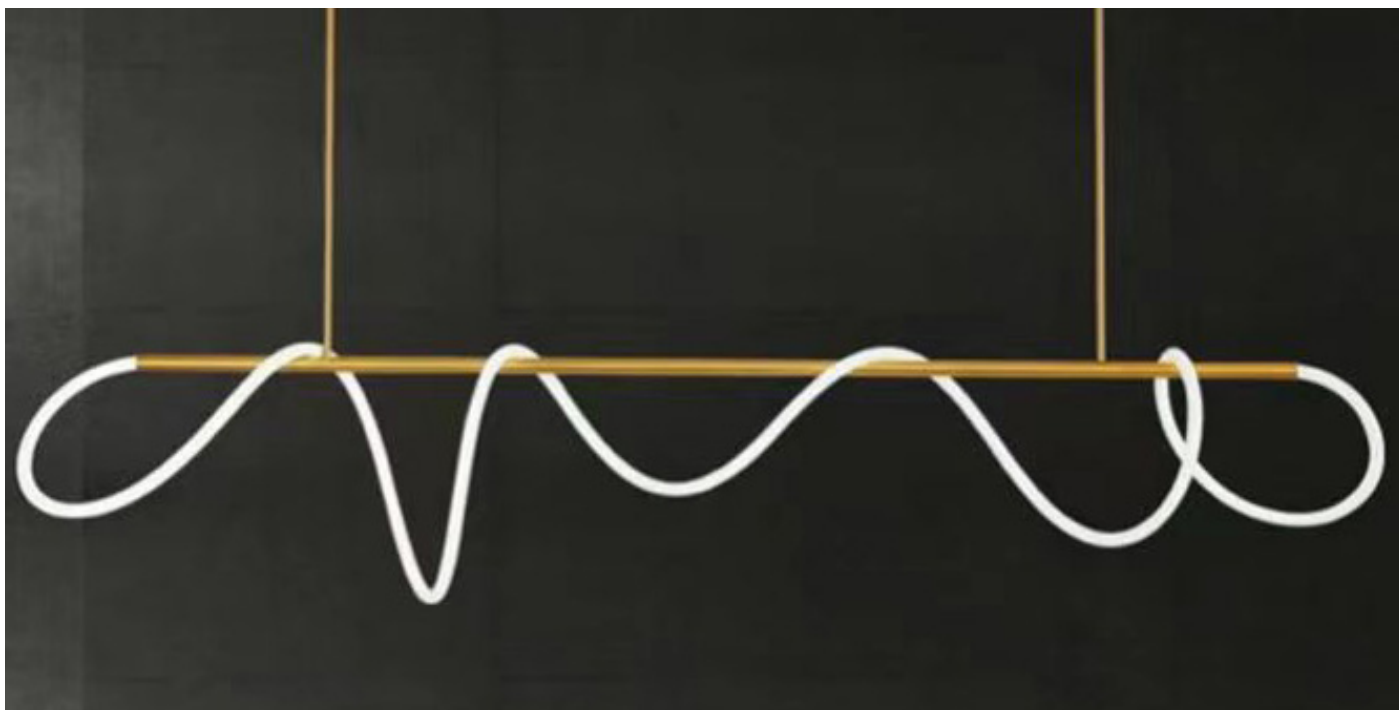

BLHL-153-1
W1500mm
60w 3000k / 4000k



BLHL-126-3
(from left to right)
A: W170 x H300mm
B: W300 x H260mm
C: W230 x H220mm
E27

****Single header is available!**




BLHL-127-4
W300 x H40mm
24W Tri Colour
Dimmable with Remote



BLHL-130-1
W1200 x H60mm
32W Tri Colour
Black/White
(shine up and down)
Dimmable with Remote



BLHL-160-1
W1200 x H30mm
30W Tri Colour
Light Wood / Dark Wood
Black / White
Dimmable with Remote

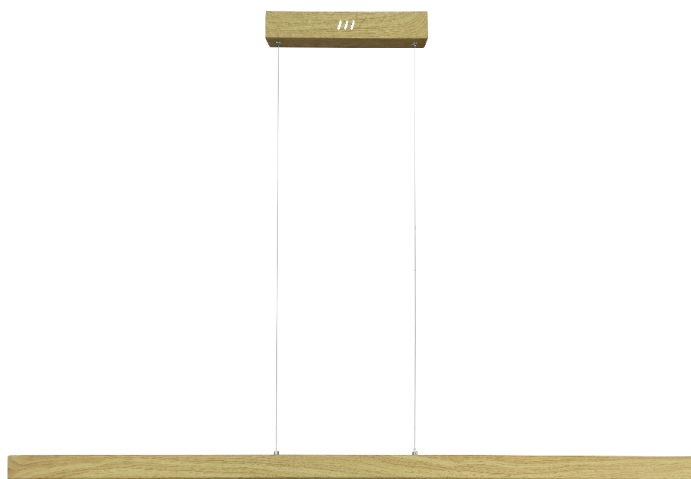

BLHL-141-9
W1000 x H250mm
G9 x 9pcs



BLHL-142-1
W500 x H50mm
30W Tri Colour
Dimmable with Remote





Ring Pendant Light-01

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Base (mm)	Remote Control	Material	
RPL01-1-40	40	3250	>85	400	170xH45	Yes	AL+PC	
RPL01-1-60	50	3250	>85	600	170xH45	Yes	AL+PC	
RPL01-1-80	60	3250	>85	800	170xH45	Yes	AL+PC	
RPL01-2	50	3500	>85	400+600	220xH45	Yes	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	White/Black/Gold	2835	20	>0.65	-20--45



Ring Pendant Light-02

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)		Base (mm)	Remote Control	Material
RPL02-4	80	5600	>85	200+400+600+800		280xH45	Yes	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	Black/White/Gold	2835	20	>0.65	-20--45




Ring Pendant Light-04

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)		Base (mm)	Dimmable	Material
RPL04-3	40	4200	>85	200+330+460		600x80xH45	No	AL+PC
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	White	2835	20	>0.65	-20--45



Stainless Steel Pendant Light-05 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Colour
BLHL-148-1	40	3200	>85	1200	170	Yes	Rose GD
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Material	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	ST	20	>0.65	-20--45

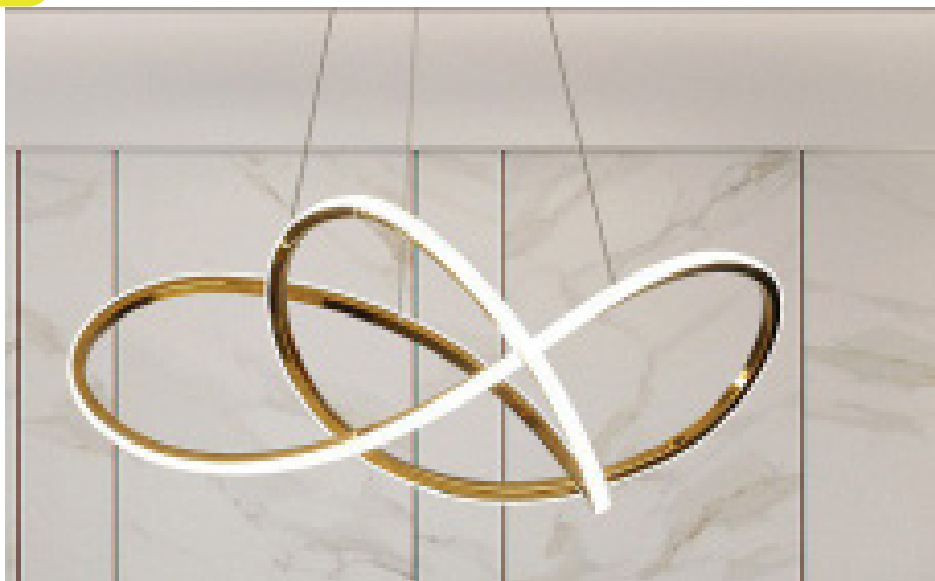

Stainless Steel Pendant Light-01 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	Chip	Dimmable	Material
BLHL-150-1	30	2400	>85	600	2835	Yes	ST
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	Gold	20	>0.65	-20--45



Stainless Steel Pendant Light-02 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	Chip	Dimmable	Material
BLHL-151-1	36	2880	>85	600	2835	Yes	ST
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	Gold	20	>0.65	-20--45



Stainless Steel Pendant Light-03 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	L (mm)	H (mm)	Base (mm)	Dimmable	Material
RPL03-1	35	2450	>85	550	210	200	Yes	ST
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	Gold	2835	20	>0.65	-20--45



Stainless Steel Pendant Light-09 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	Ring Size (mm)	Base (mm)	Remote Control	Material	
BLHL-155-1	40	3200	>85	400+600	220xH45	Yes	AL+PC	
BLHL-154-1	40	3200	>85	300+400+600	220xH45	Yes	AL+PC	
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Colour	Chip	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	Black/Gold	2835	20	>0.65	-20--45



Stainless Steel Pendant Light-04 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Colour
BLHL-105-1	40	3200	>85	1110	150	Yes	GD/BK
BLHL-105-1	48	3840	>85	1340	150	Yes	Rose GD
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Material	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	ST	20	>0.65	-20--45



Stainless Steel Pendant Light-07 (with remote controller)

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Colour
BLHL-144-1	40	3200	>85	800	500	Yes	GD
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Material	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	ST	20	>0.65	-20--45



Features

- With 2m Hanging Wire
- Up And Down Light function
- Osram LED
- UGR<9

Pendant Light With Sensor

Model	Power (W)	Lumens (lm)	CRI (Ra)	D (mm)	H (mm)	Dimmable	Colour
BLHL-166-650	60	6000	>90	650	50	Yes	WH with BK
Color Temp (K)	Voltage (V)	Beam Angle(°)	Lifespan (hrs)	Material	IP	PF	Working Temp (°C)
3000-6500	110-265	120	30000	AL	20	>0.65	-20--45

* Hanging Wire is flexible adjustable by push and pull only



BLHL-122-3
W180x H370mm
E27



BLHL-136-1
D190 x H130mm
E27
(Black / White)

**Single header is available!



BLHL-29-3 (WOOD)
 W260 x H230mm
 W290 x H250mm
 W210 x H210mm
 E27



BLHL-28-3 (WOOD)
 W230 x H230mm
 W230 x H230mm
 W260 x H230mm
 E27



BLHL-5-3
 D200 x H250mm
 E27



BLHL-12-3
 D250 x H260mm
 E27
 (Black / White / Gold)



BLHL-11-3
 W200 x H220mm
 E27

****Single header is available!**



BLHL-7-3
W130x H250mm
E27



BLHL-4-3
D250 x H200mm
E27



BLHL-1-3
D230 x H230mm
E27



Three Shape Combo



BLHL-6-3
D220 x H170mm
E27



BLHL-152-3
D200 x H220mm
E27

****Single header is available!**



BLHL-18-3
D170 x H320mm
E27



BLHL-2-3
D100 x H350mm
E27



BLHL-8-3
D140 x H220mm
E27



BLHL-19-3
W250 x H260mm
E27



BLHL-110-3 (Wood + Glass)
W190 x H180mm
E27

****Single header is available!**